THE OHIO STATE UNIVERSITY

Mixed-mode Diesel HCCI with External Mixture Formation: Preliminary Results

Shawn Midlam-Mohler, Yann Guezennec, **Giorgio Rizzoni**

The Ohio State University

Center for Automotive Research

Michael Bargende, Simon Haas

FKFS, Universität Stuttgart

rizzoni.1@osu.edu

http://car.eng.ohio-state.edu

DEER 2003

Newport, August 26th, 2003

Outline

1. Mixed-mode HCCI/DI concept
2. Experimental results in single-cylinder engine
3. Future Work

THE OHIO STATE UNIVERSITY

1. Mixed-mode HCCI technologies

Basic concept

- Single fuel system: Diesel
- Two injection systems
  - Port/manifold injection – low pressure atomizer system
  - Direct injection - high-pressure injection system
- Atomizer system delivers fuel as a pre-mixed lean homogeneous mixture in the cylinder.
- Homogeneous charge ignites due to compression, or alternatively due to triggering from direct injection pulse
  - Allows more control over HCCI SOC

Characteristics

- Small droplet size (< 1μm mean diameter) allows rapid evaporation during compression stroke, removing the need for intake air heating (leading to higher CR).
- EGR and valve actuation control (based on models of combustion delay and reaction rates) permits SOC control.
- Direct injection supplements the reaction with additional fuel as a function of load for high-torque output.

THE OHIO STATE UNIVERSITY

Engine Operation

- Low load
  - Main torque from homogeneous charge (HC) fuel
  - Direct Injection (DI) mainly for ignition
- Mid load
  - Increasing HC fuel
  - Increasing DI fuel
- High load
  - Max HC fuel
  - Increasing DI to full load

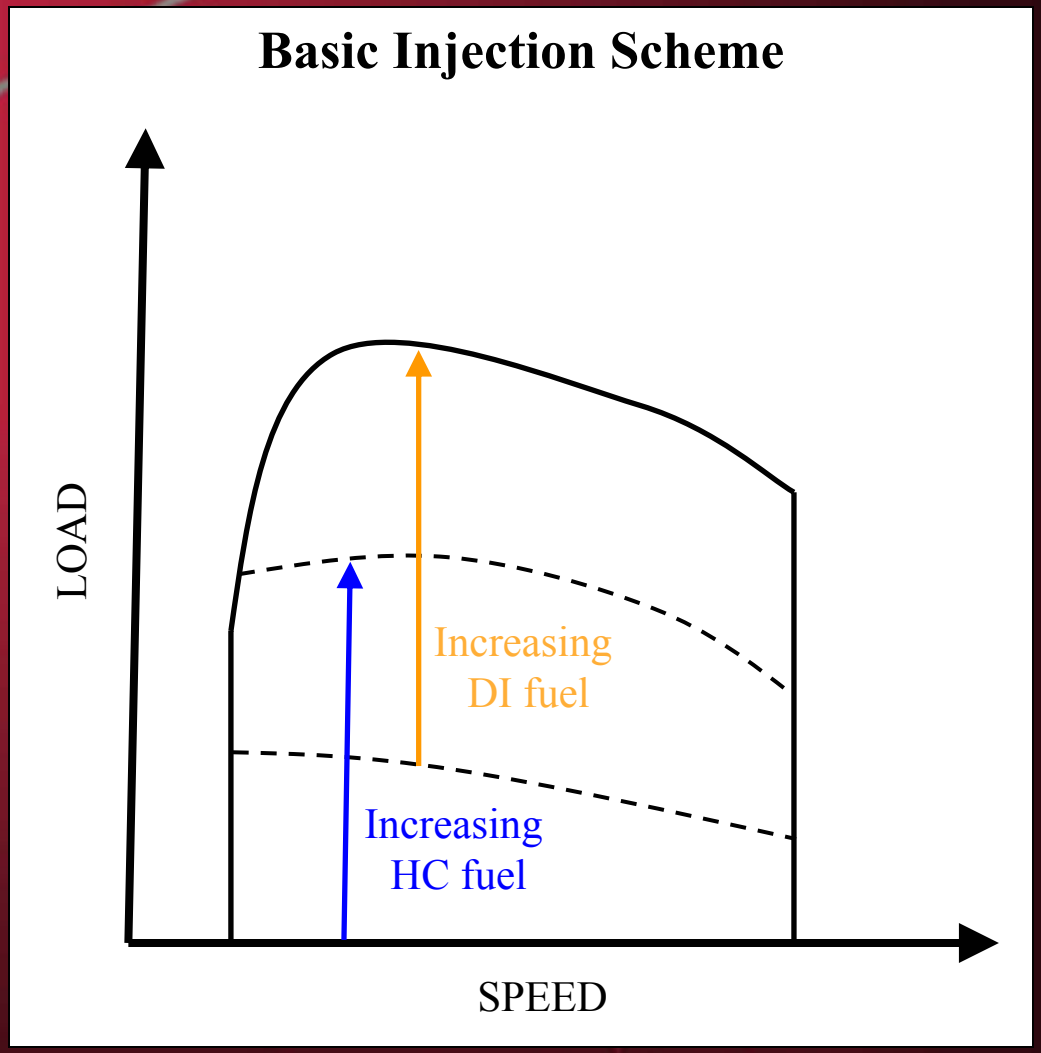

Diesel HCCI Methods

- External Mixture Formation
  - Port-Injection/Fumigation: fuel is injected in the intake air as it enters the cylinder
- Internal Mixture Preparation
  - Early In-Cylinder Injection: Fuel is injected in the cylinder well in advance of TDC
  - Late In-Cylinder Injection: Fuel is injected in the cylinder near TDC

HCCI combustion with External Mixture Preparation

- Advantages:
  - Utilizes turbulence at intake port to promote mixing; very homogenous charge
  - For mixed mode combustion, the conventional direct injection fuel system can be optimized for *just direct injection* operation; it does not have to be a compromise between the different requirements of HCCI injection and DI injection.
- Disadvantages:
  - Diesel fuel difficult to atomize with conventional atomization techniques
  - Wall wetting can lead to high HC and smoke emissions and oil dilution

THE OHIO STATE UNIVERSITY

Generation 1 Atomizer

Maximum Power Consumption	320 W
Maximum Flow Rate	20 mL/min
Environmental Temperature Limits:	
Lower	Tested to -5 deg. C with no loss of performance
Upper	Not evaluated; no problems are expected
Physical Dimensions	1” x 1” x 4”
Fuel Pressure Requirement	< 40 psi
System “warm-up time”	5 seconds
Power source	12 VDC

THE OHIO STATE UNIVERSITY

Atomization Quality

T = 0 min.

T = 2 min.

T = 8 min.

2 mL of diesel in a 2 L flask at room temperature

THE OHIO STATE UNIVERSITY

Droplet Size Distribution

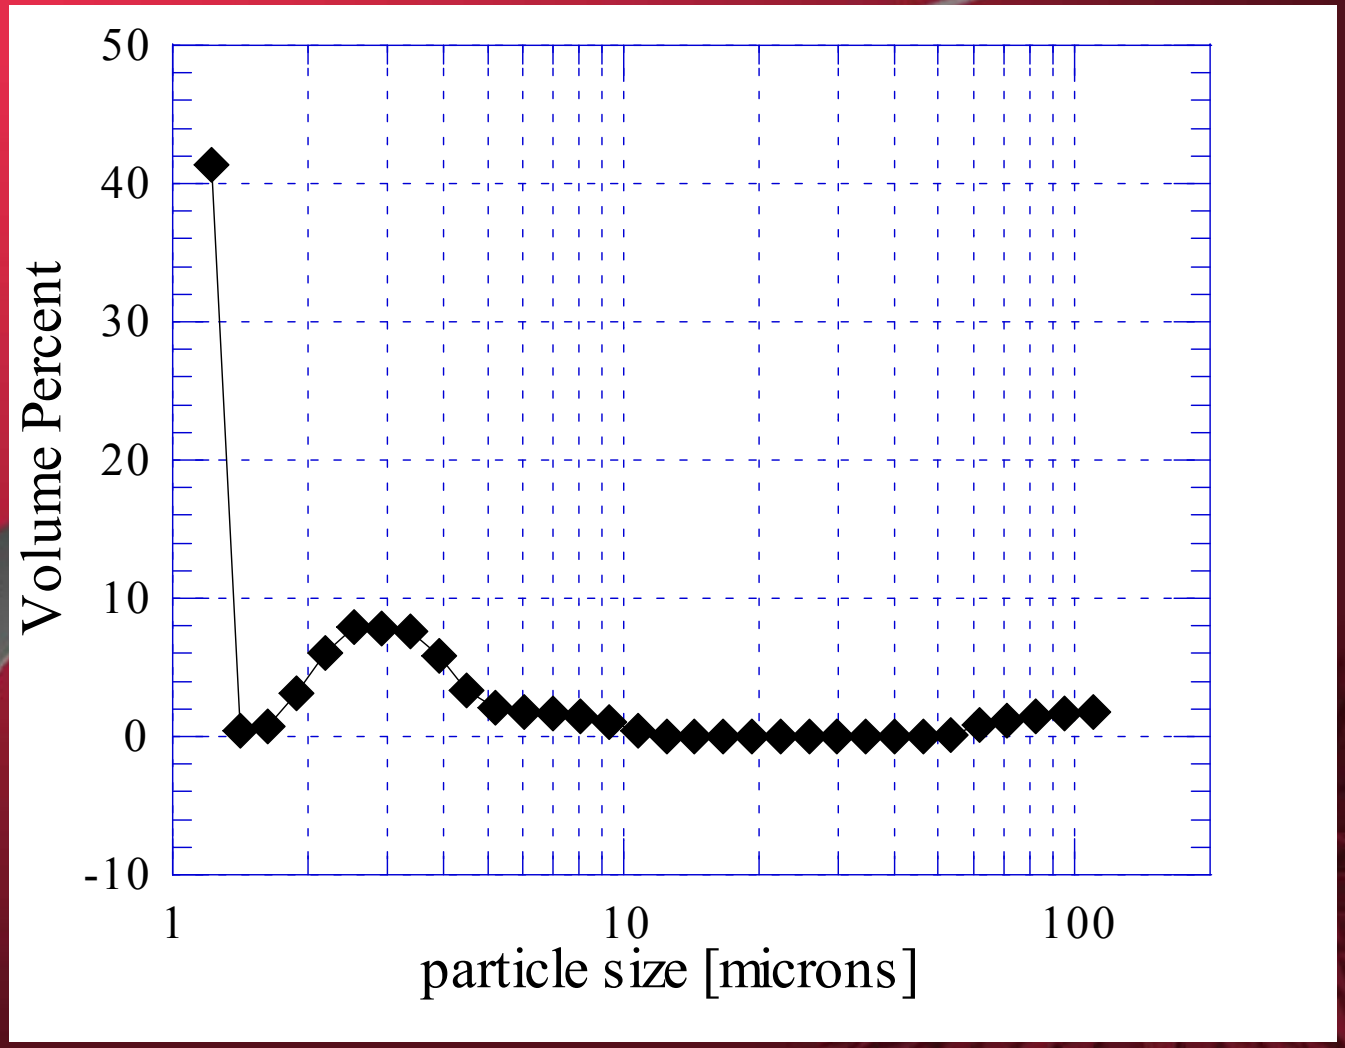

THE OHIO STATE UNIVERSITY

Sample Combustion Quality

10 kW premixed, diesel flame, AFR = 16 burning at atmospheric conditions

The fine atomization allows for spark ignition of diesel fuel

Generation 2 Atomizer

THE OHIO STATE UNIVERSITY

Status of the Technology

- Patent pending
- Gen. 3 prototypes available for testing in September 2003
  - Technology is still under development
  - Current system is suitable for laboratory testing
- Improvements to be made in:
  - Reducing power consumption
  - Improving flow rate control
  - Reducing size
- Cost to mass produce has not been evaluated
  - Estimated to be between the cost of a gasoline port fuel injector and a direct injection diesel fuel injector

The atomizer and HCCI mixture preparation

- Low momentum particles follow air streamlines
  - Minimal wall impingement = low wall wetting
    - Lower HC, smoke, and reduced oil dilution
  - Mixing properties are very good in turbulent flows
- Can effectively atomize diesel fuel at low temperatures
- Suitable for injection of water- in- diesel emulsion

THE OHIO STATE UNIVERSITY

2. Single-cylinder engine experiments

THE OHIO STATE UNIVERSITY

Experimental study

- Conducted in collaboration with Forschungsinstitut für Kraftfahrwesen und Verbrennungsmotoren, *FKFS*, Universität Stuttgart (Prof. M. Bargende).
- Single cylinder engine in controlled environment
- First round of tests completed in Spring 2003.

FKFS

THE OHIO STATE UNIVERSITY

Single-cylinder engine

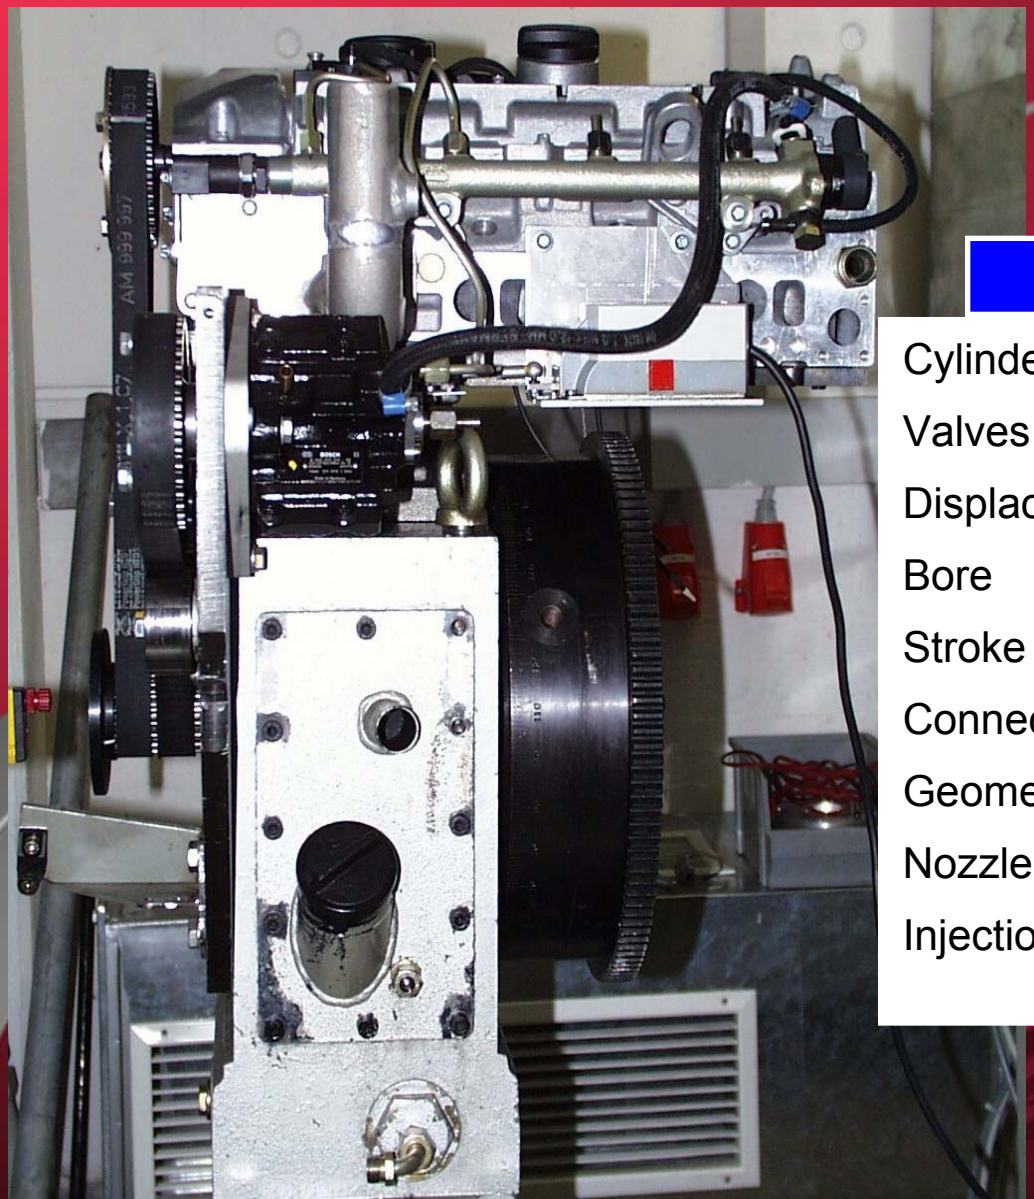

Single-Cylinder Engine OM 611	
Cylinders	1
Valves	4
Displacement	537,7 cm^3
Bore	88,0 mm
Stroke	88,4 mm
Connecting Rod	149 mm
Geometric CR	18 : 1
Nozzle Type:	6 Holes
Injection System:	Common Rail System 1350 bar

FKFS

THE OHIO STATE UNIVERSITY

Single-Cylinder Test Cell at FKFS

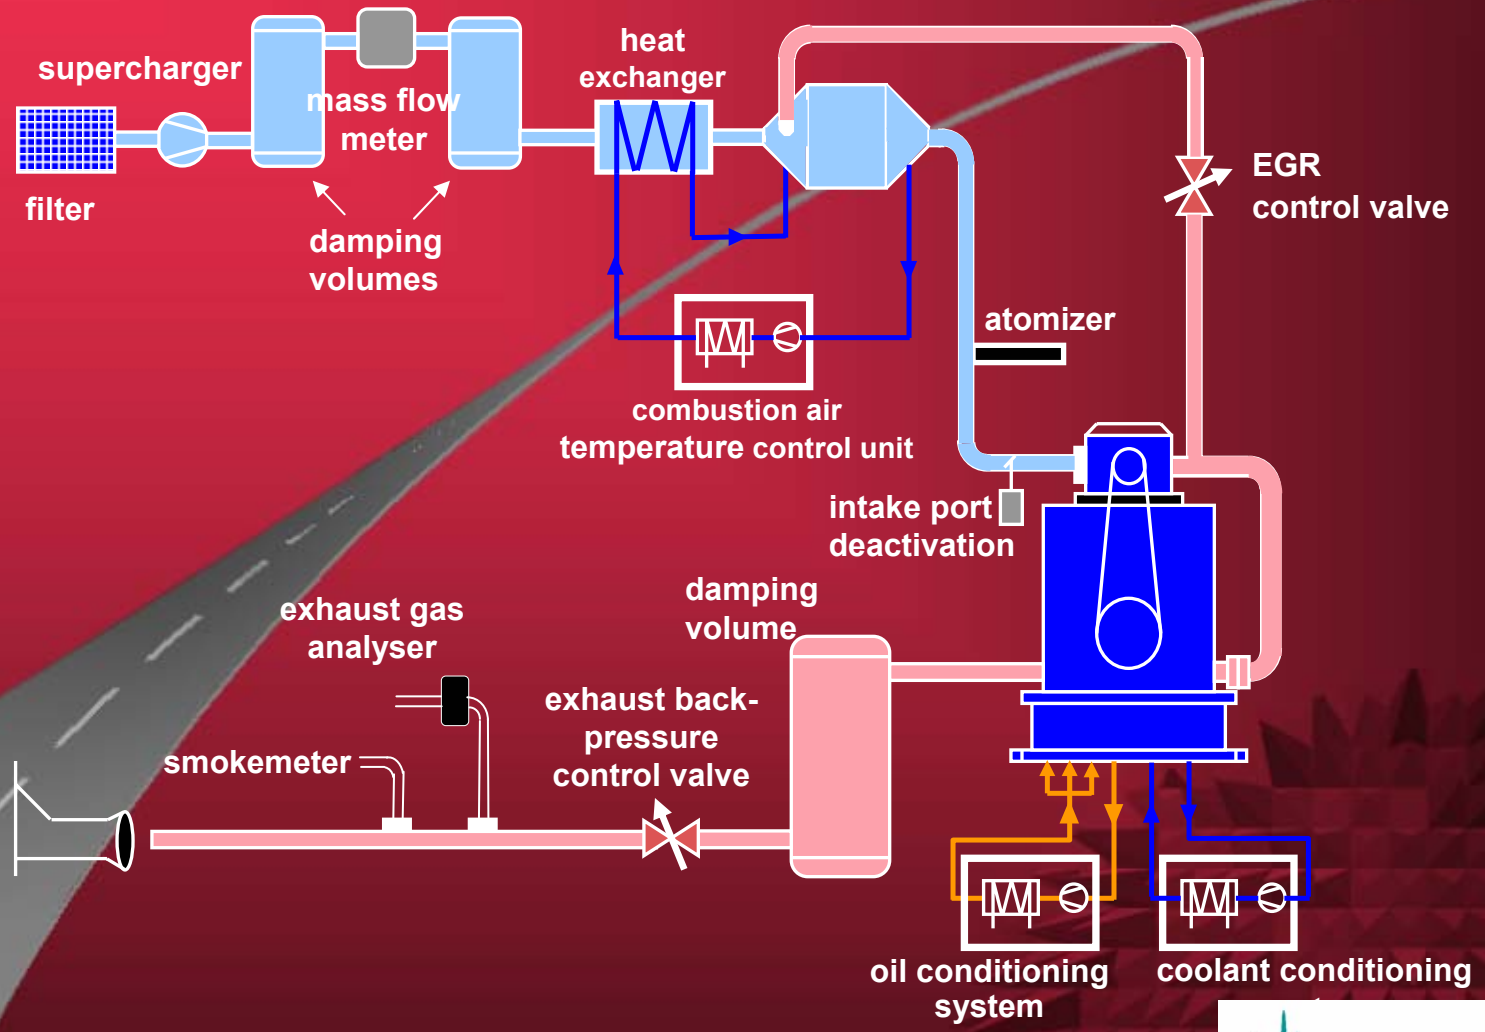

FKFS

Effect of uncooled EGR

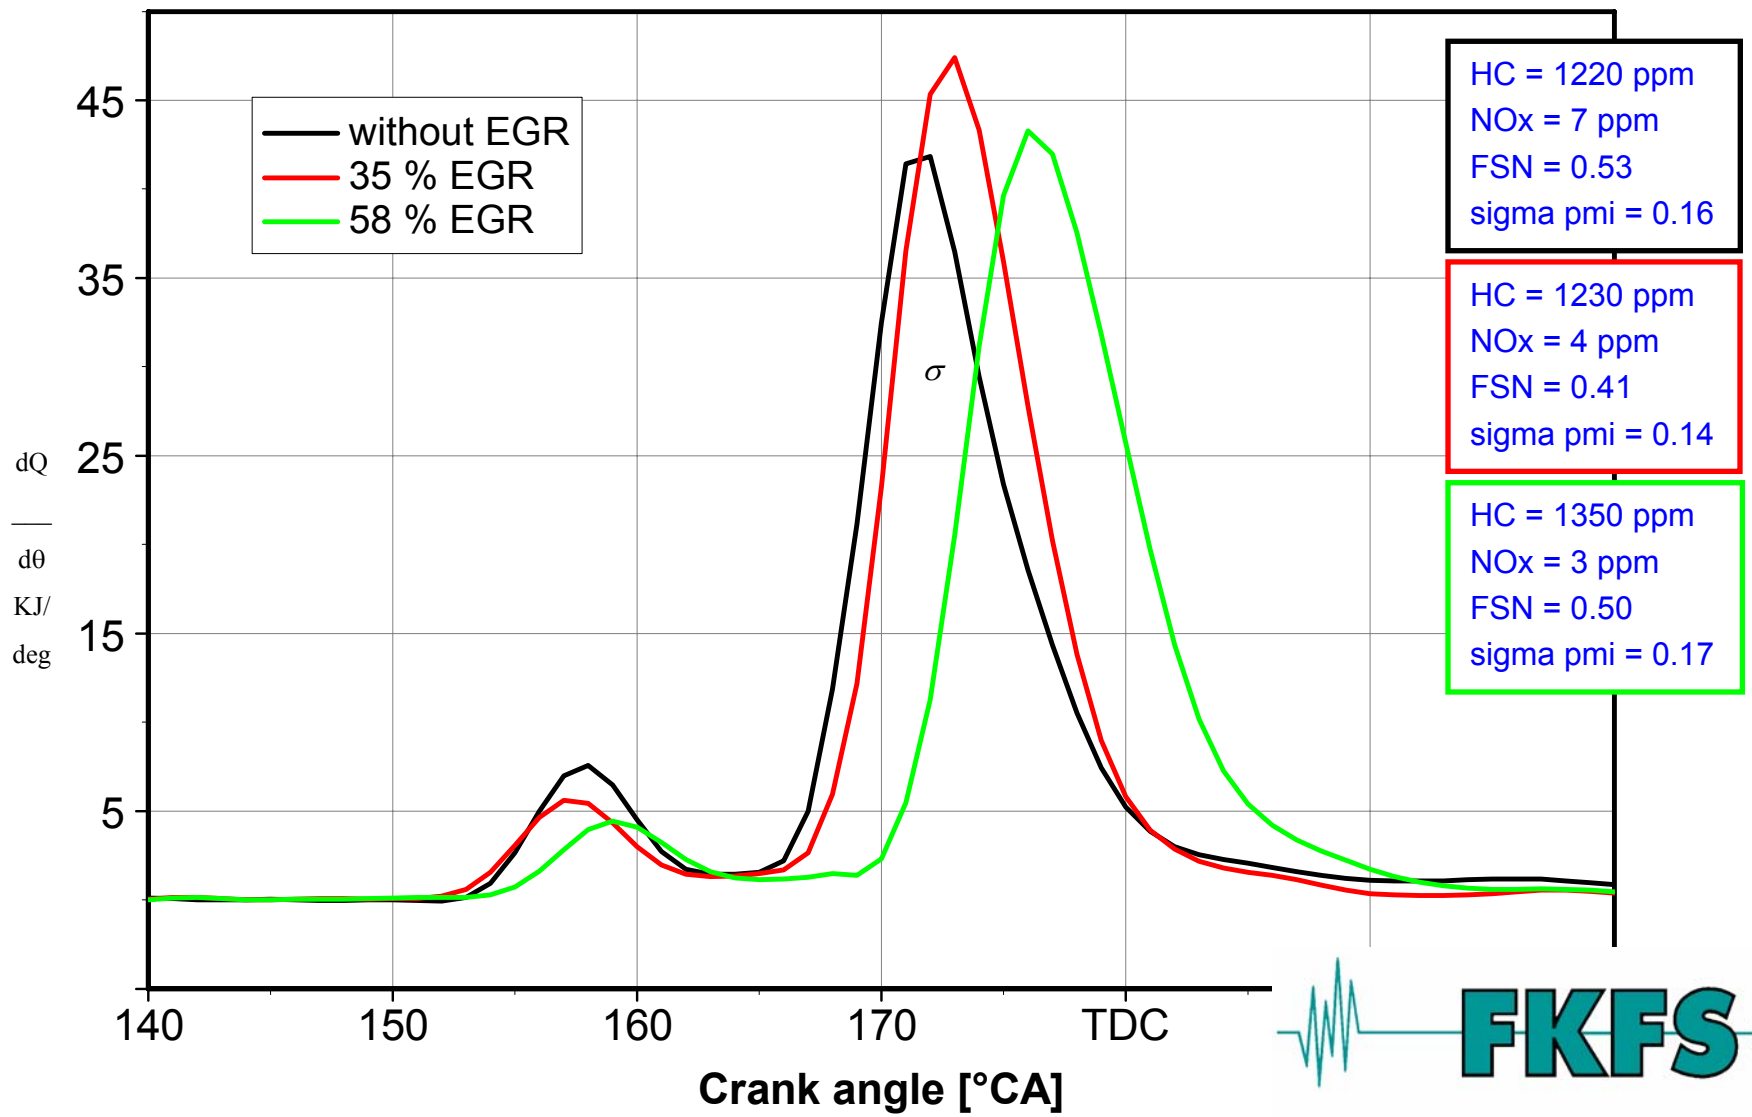

Effect of Boost Pressure

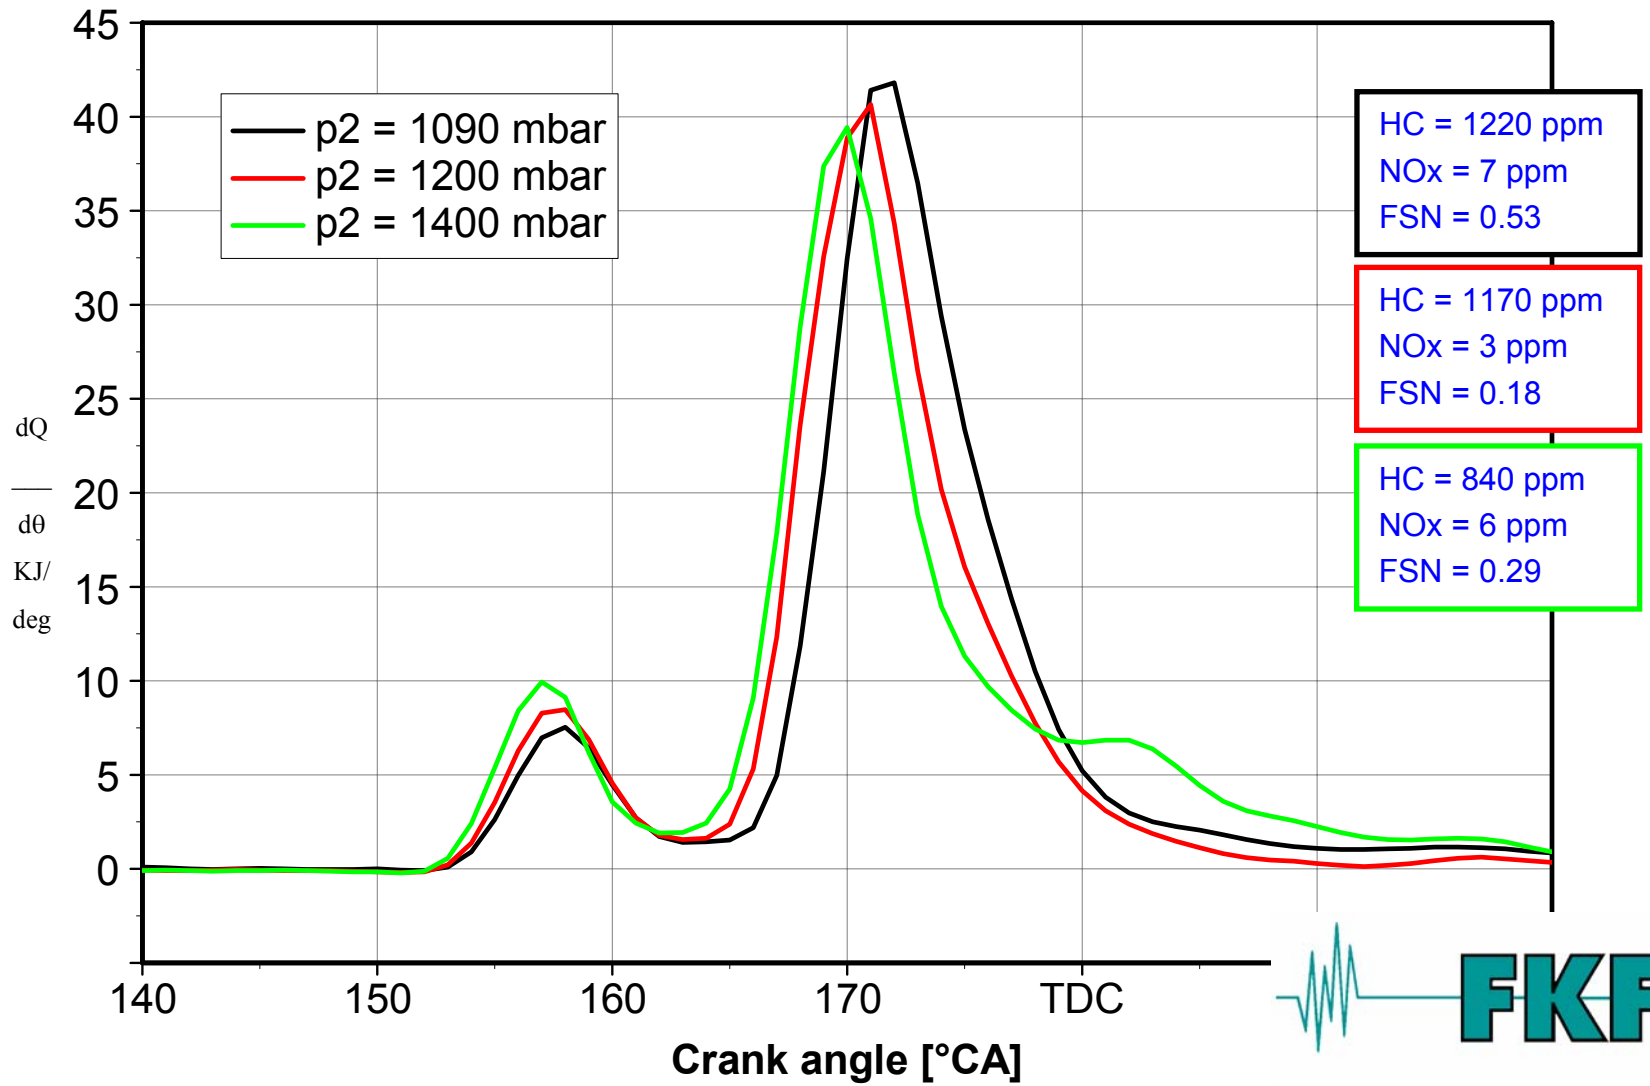

Effect of AFR Increase on IMEP

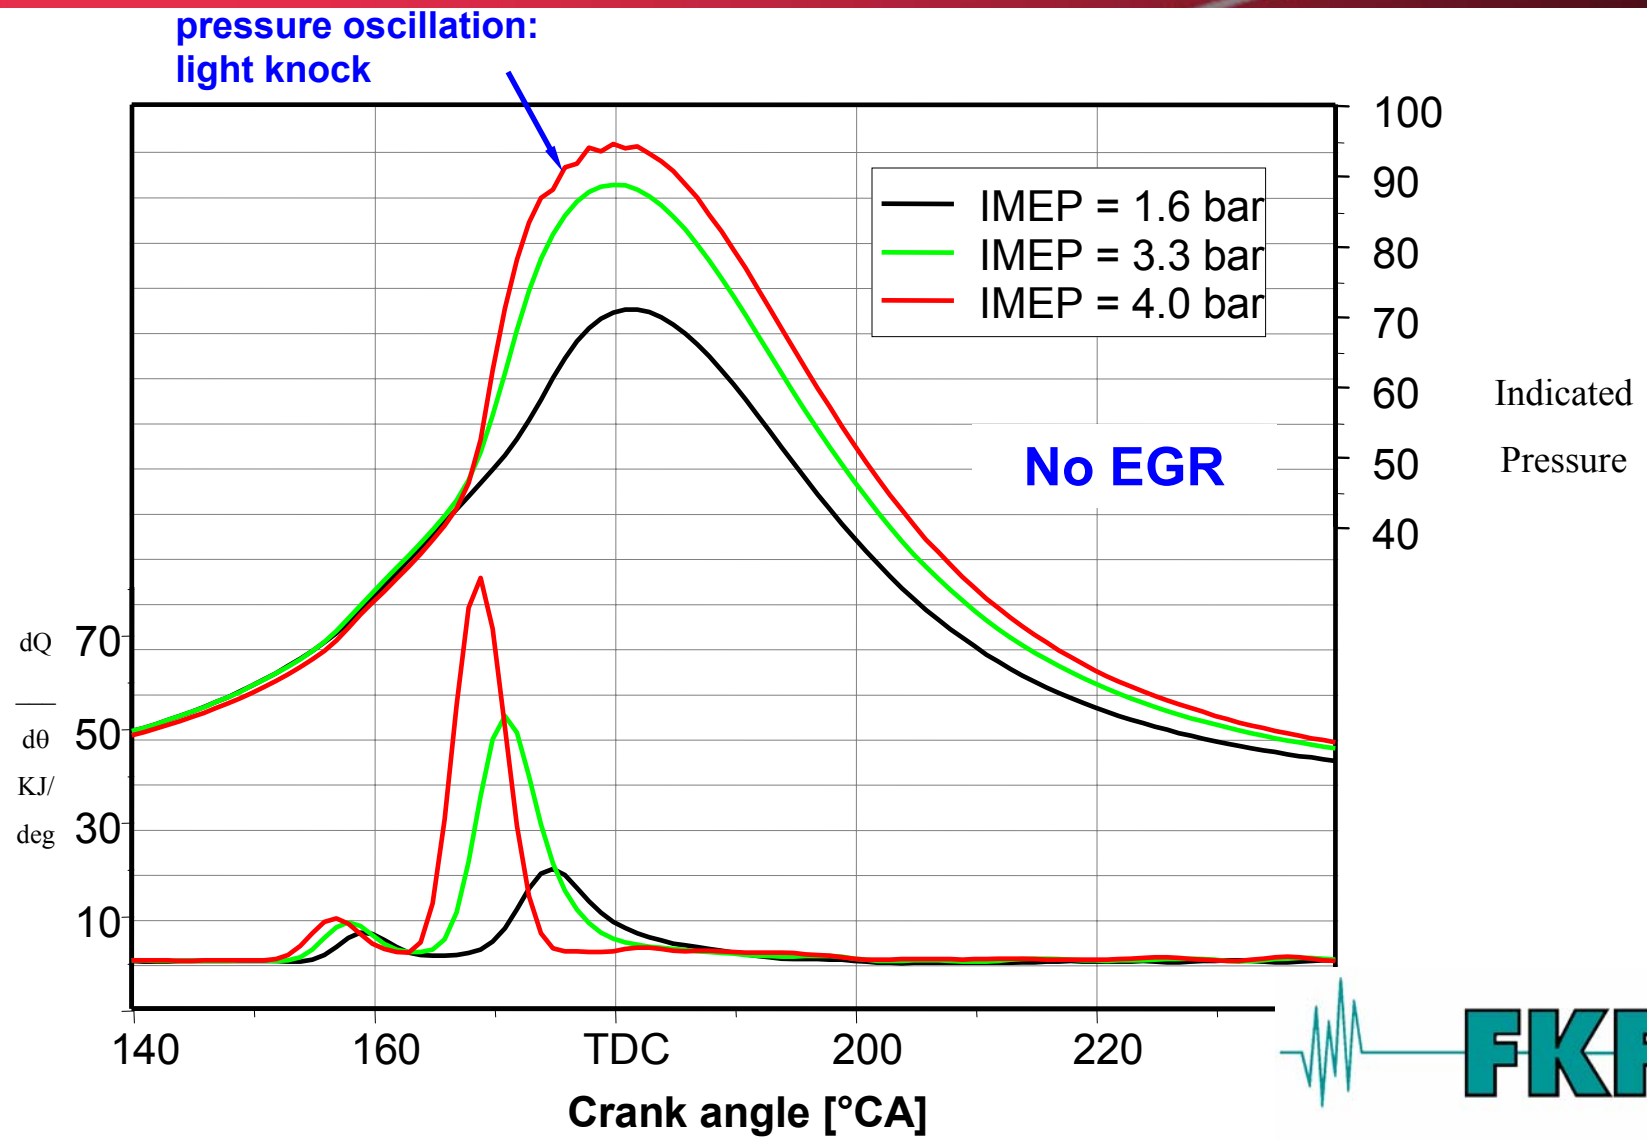

Extension of Load Range

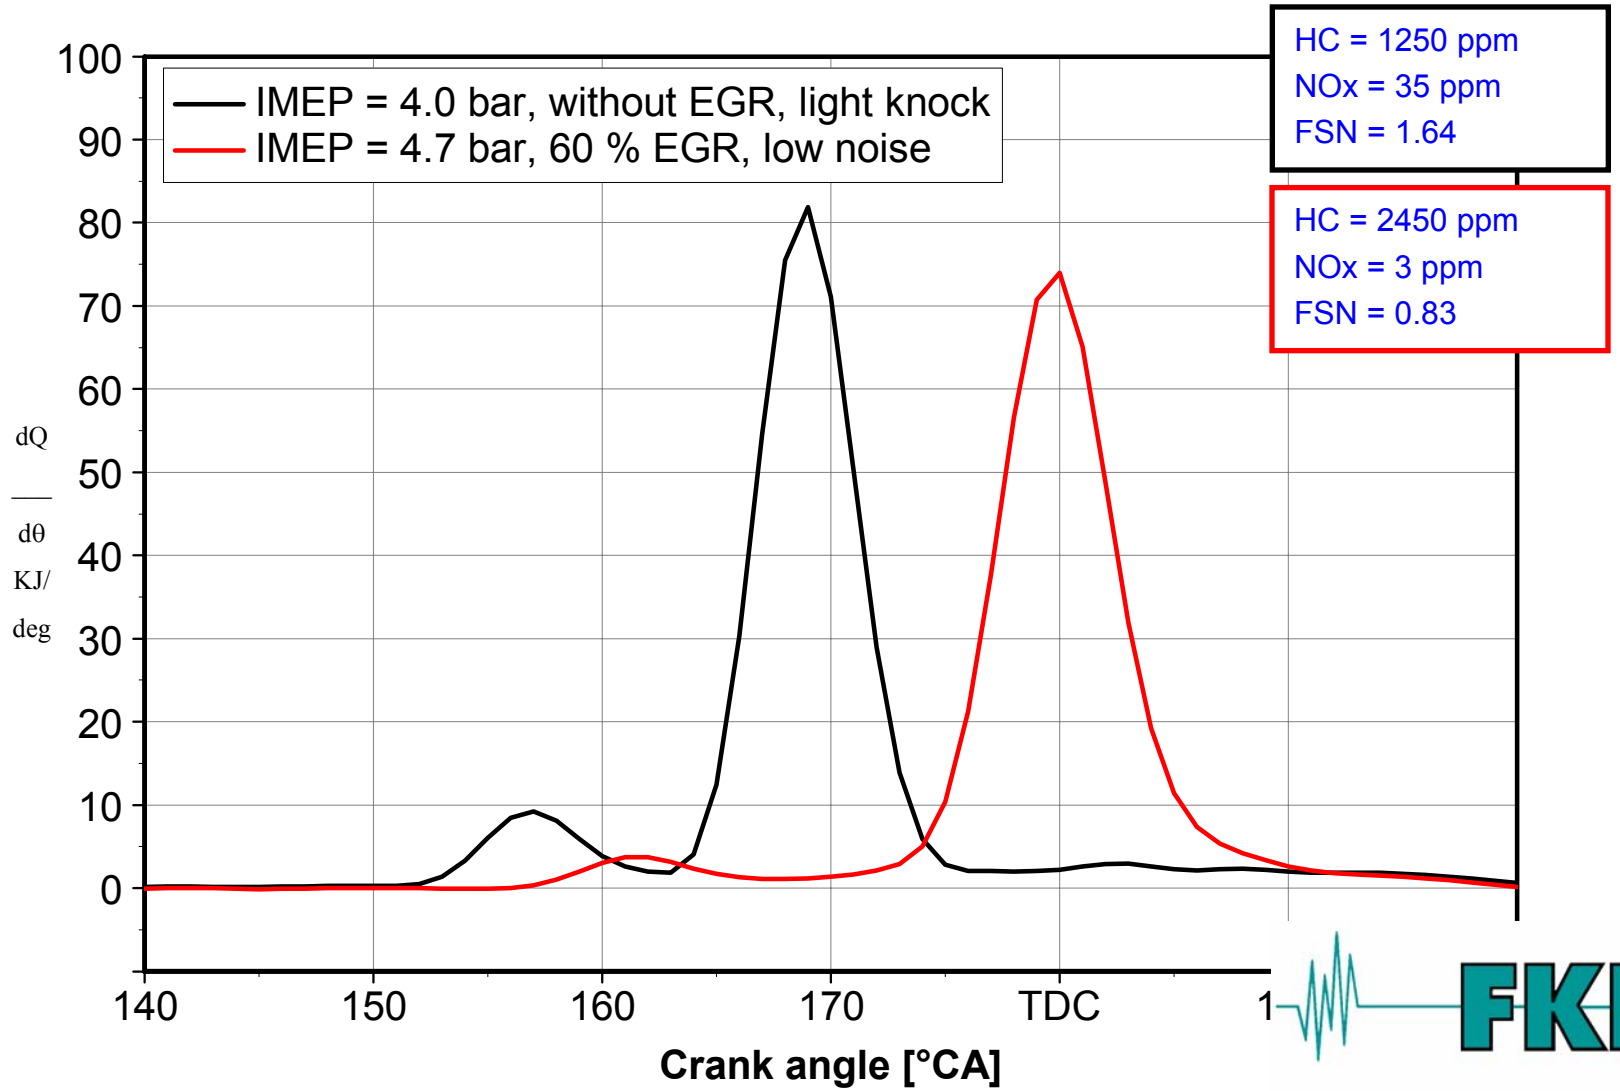

Effect of Intake Air Temperature

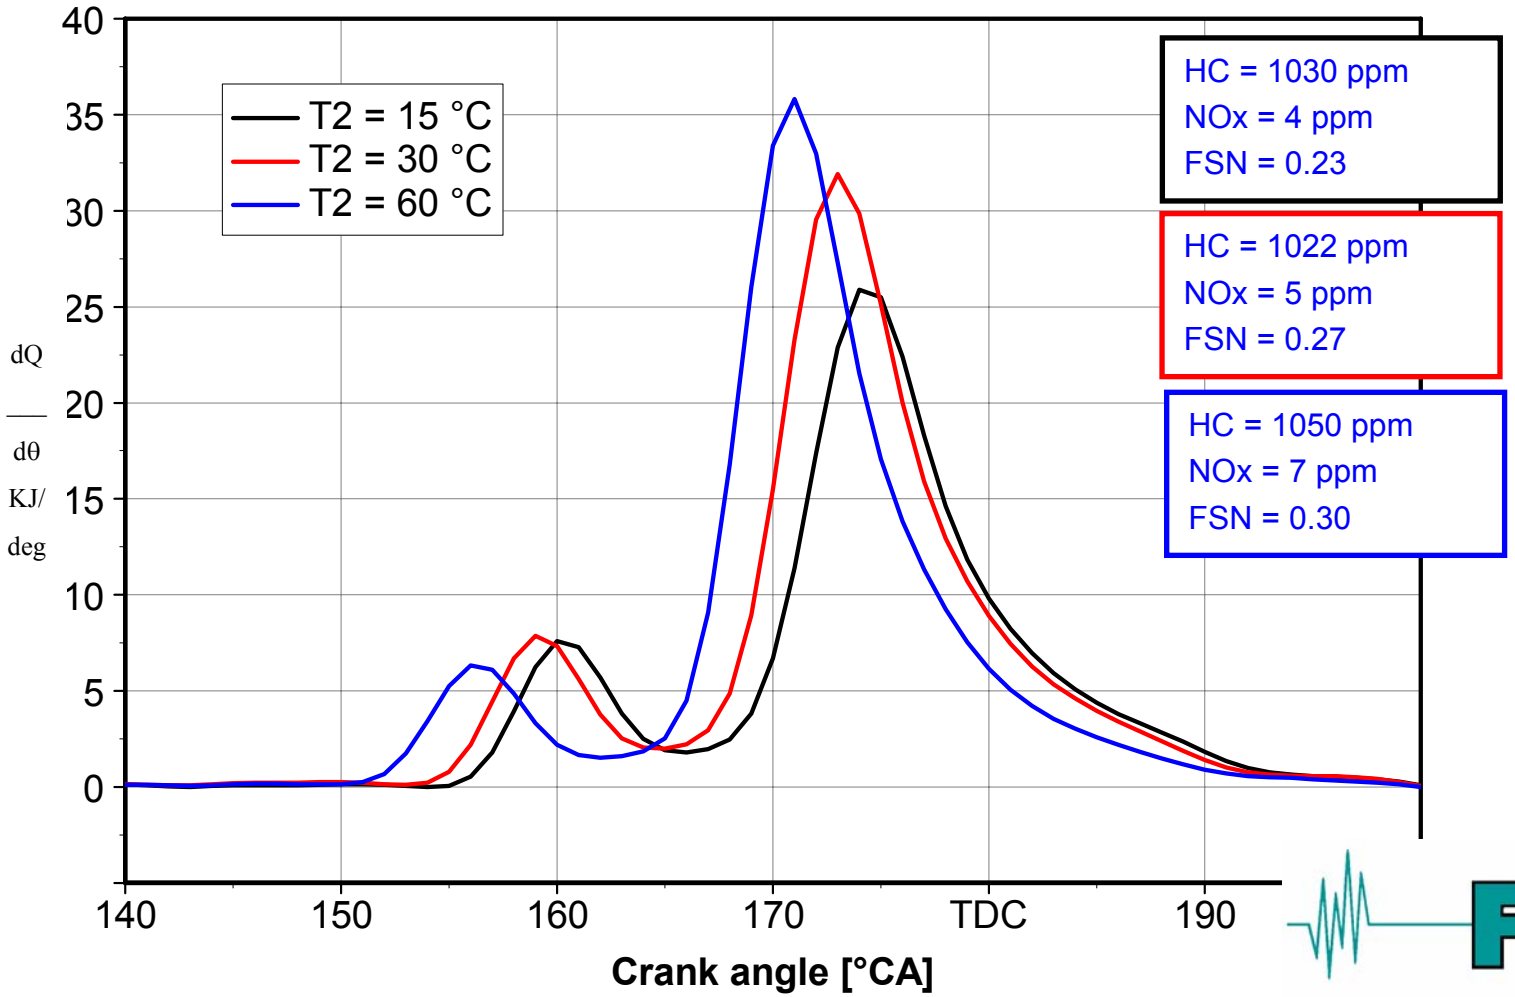

Effect of Swirl
(Intake-Port Deactivation)

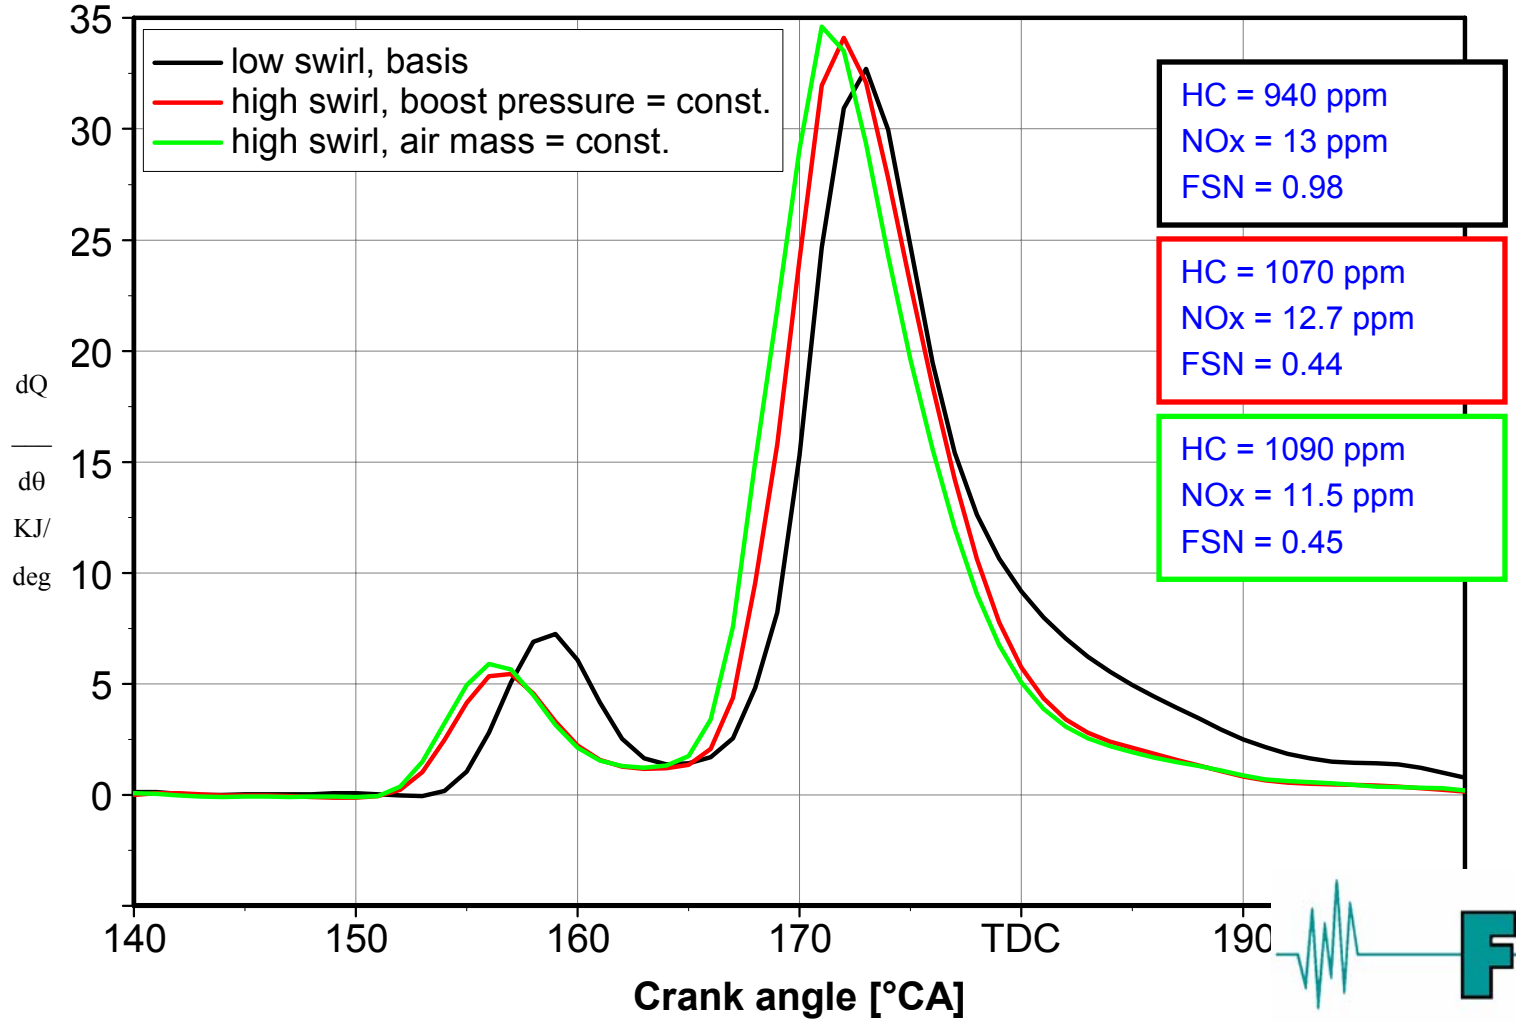

Effect of Engine Speed
(Crank Angle Domain)

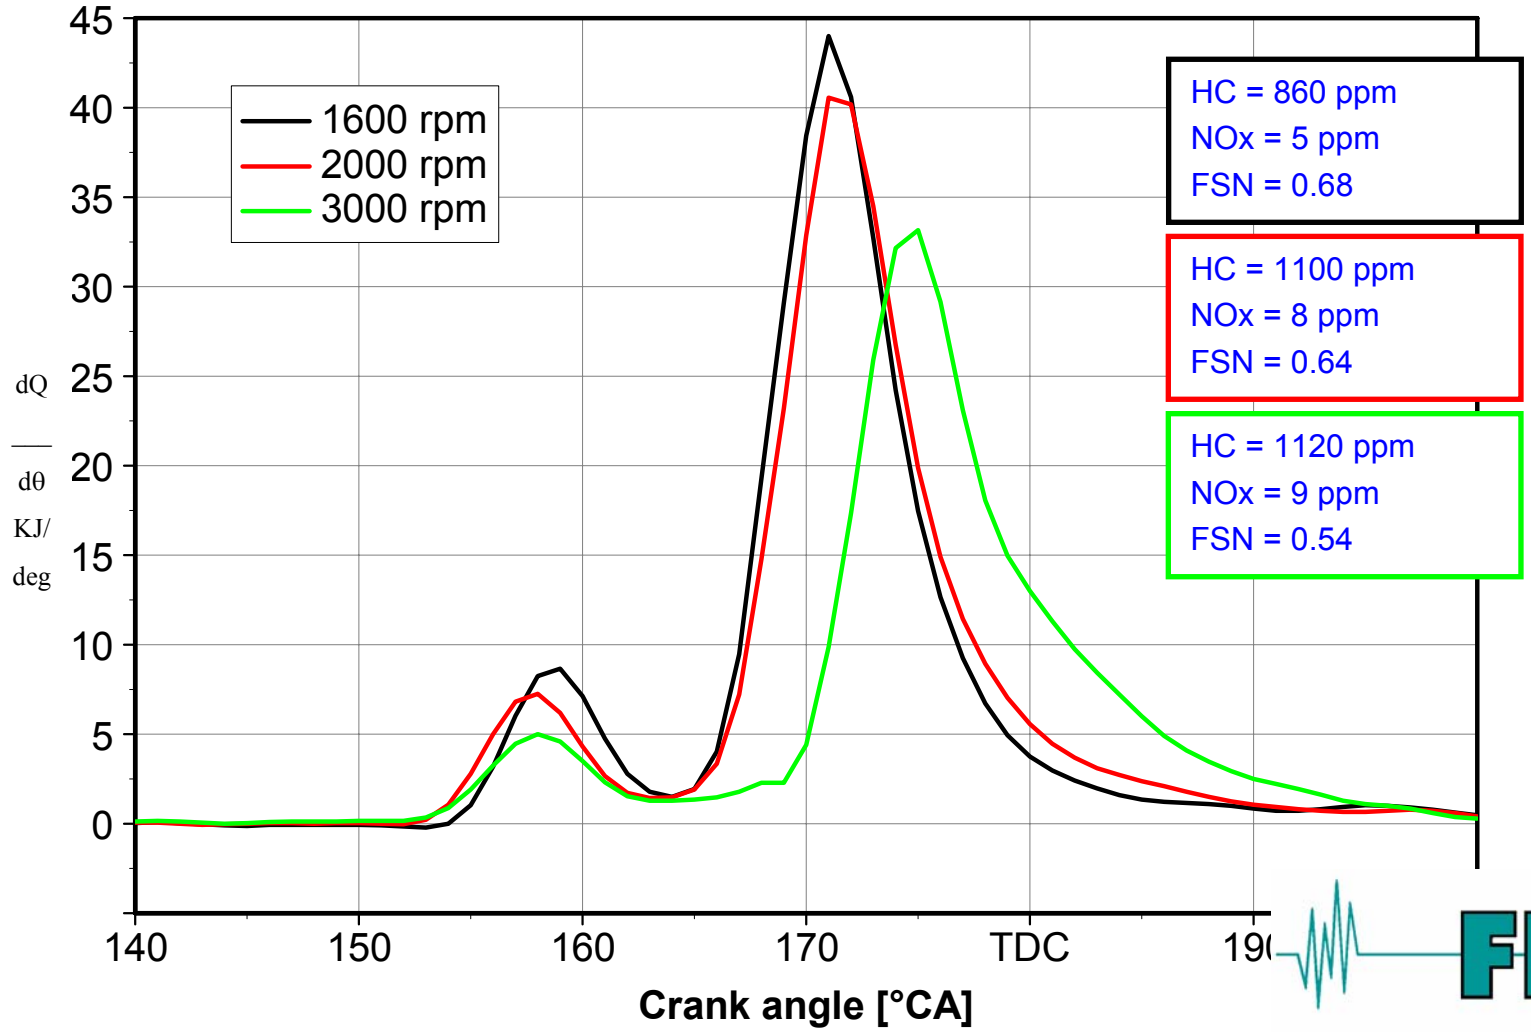

Effect of Engine Speed
(Time Domain)

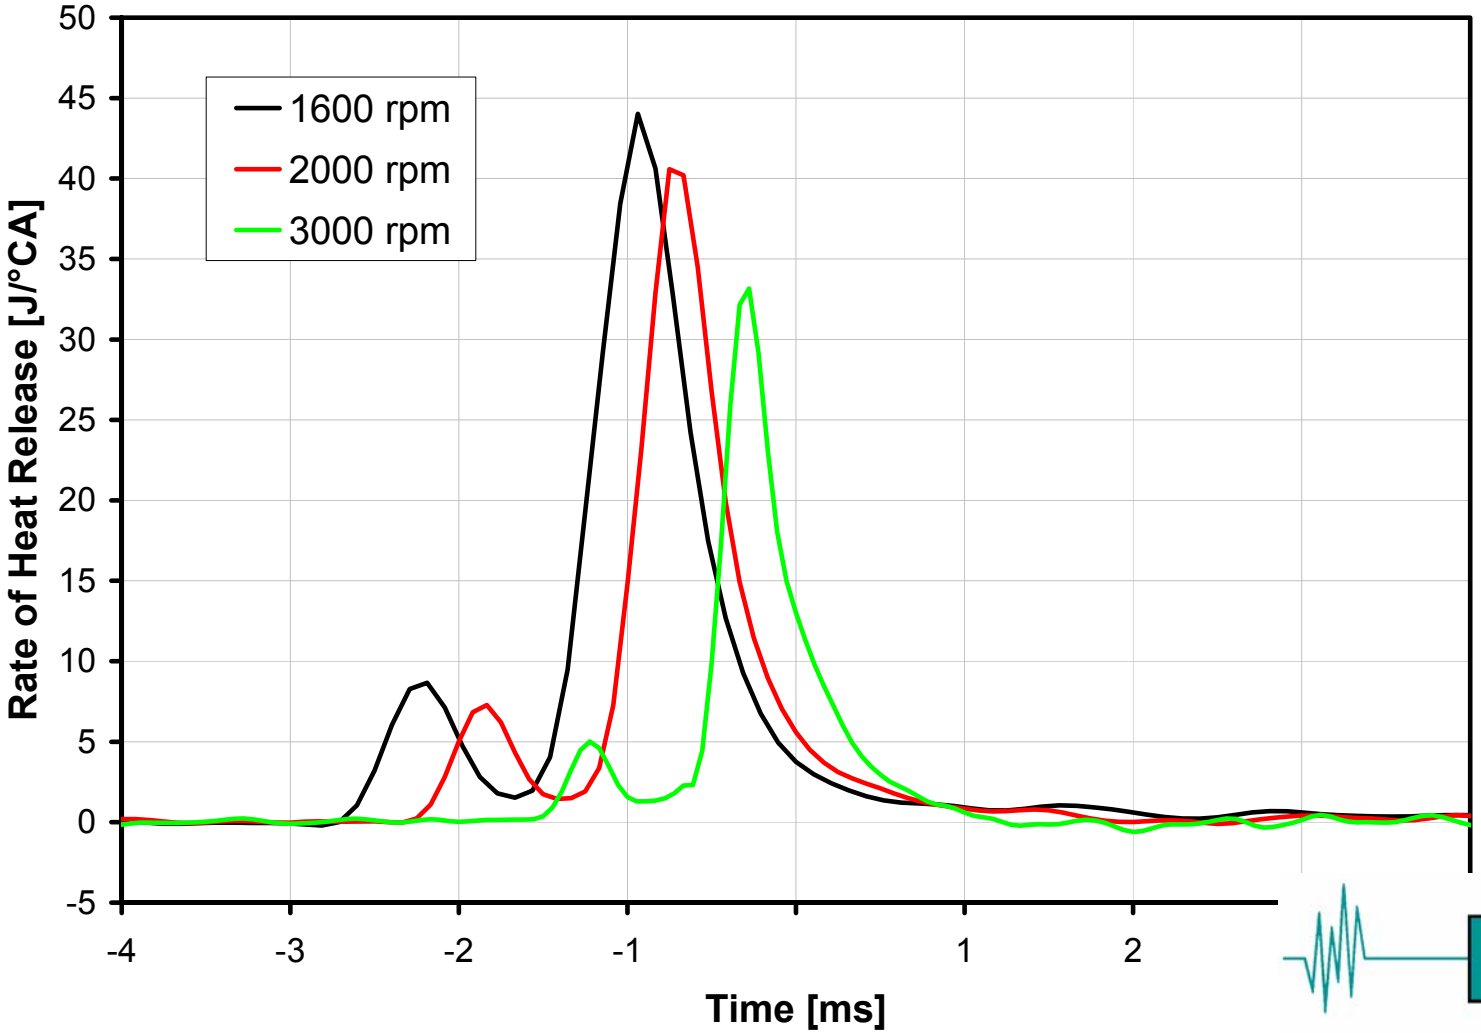

Cyclic variability (100 cycles)

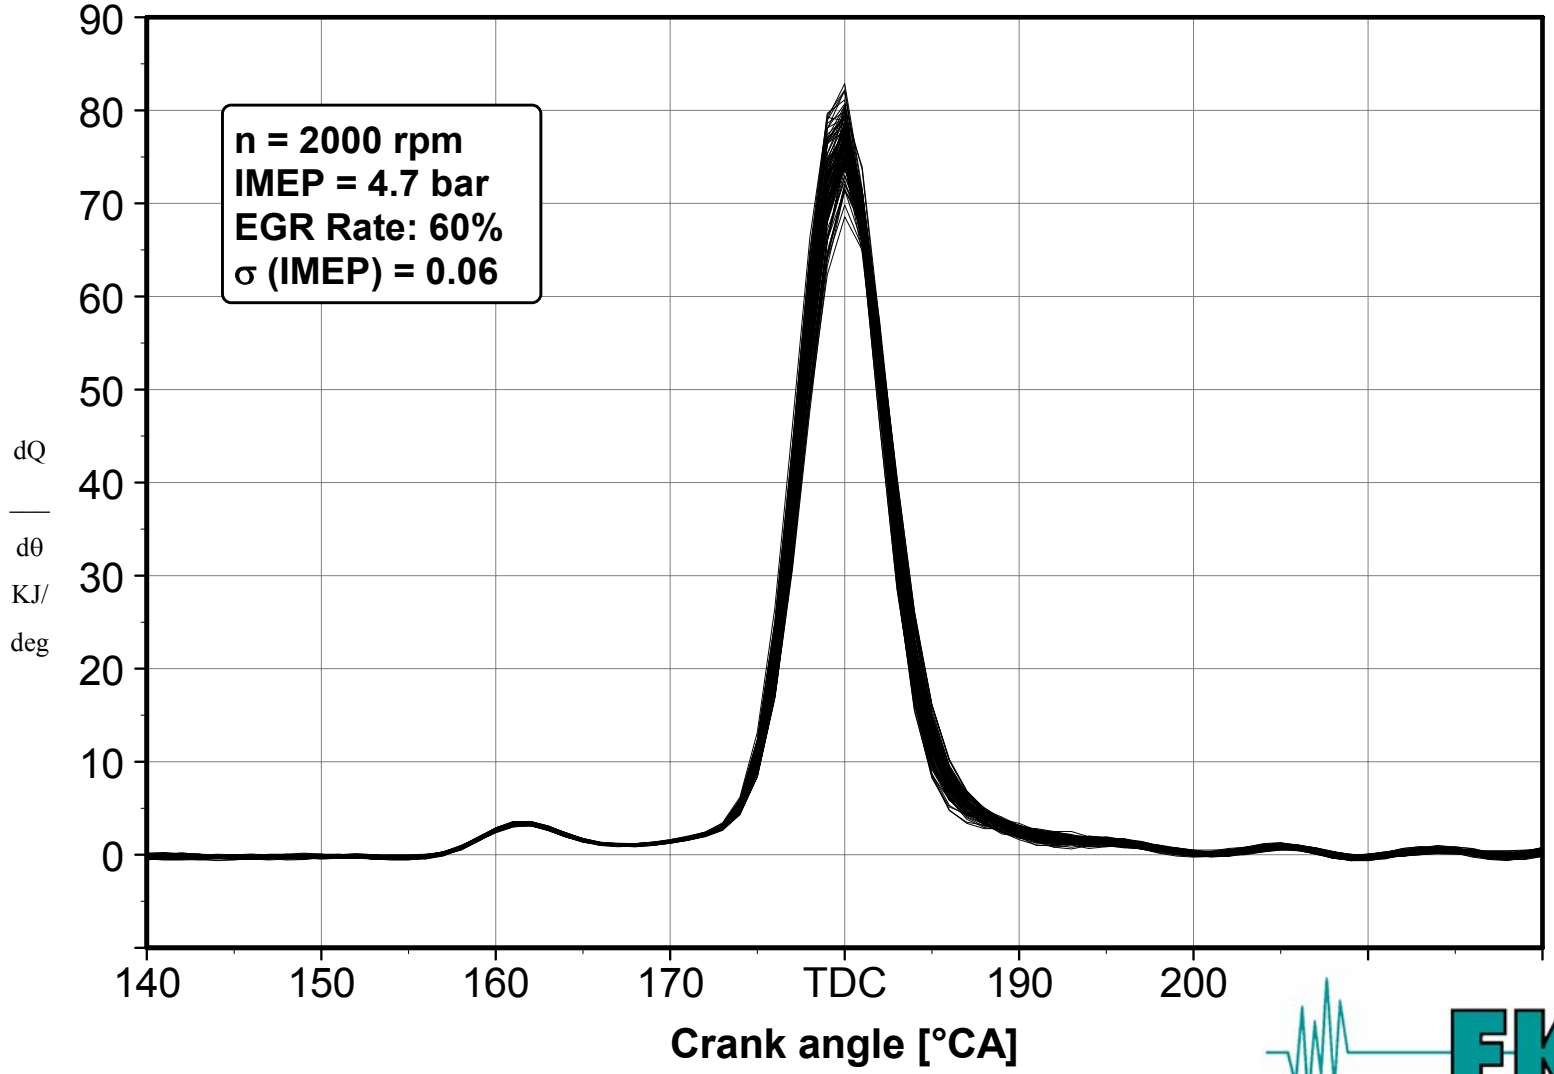

Goals for atomizer development

- Generation Three Atomizer with:
  - Flow rate sufficient to fuel a single cylinder HCCI engine at at all engine speeds
  - Closed loop fuel control system with high bandwidth control
  - 50% reduced power consumption
  - Appropriate packaging for port injection
- Development of a detailed thermo-fluid dynamic model of the atomizer system to support the above efforts

THE OHIO STATE UNIVERSITY

3. Future work

Atomizer characterization

- Proposed work in collaboration with Pacific Northwest National Laboratory (Dan Imre, Alla Zelenyuk-Imre):
  - Characterize the physical and chemical properties of the spray formed by the Ohio State novel atomizer.
    - Radial and axial variation in droplet size distributions and number concentrations will be measured as a function of an array of controllable atomization parameters: flow rate, electrical current, fuel type, fuel viscosity, ambient pressures and temperatures, etc.
    - These data will provide information on the kinetics of spray propagation, coagulation, and gas to particle partitioning to yield predictive relationships between atomizer operation and spray properties.
- Similar collaborations with Sandia, ORNL?

THE OHIO STATE UNIVERSITY

Additional single-cylinder engine tests

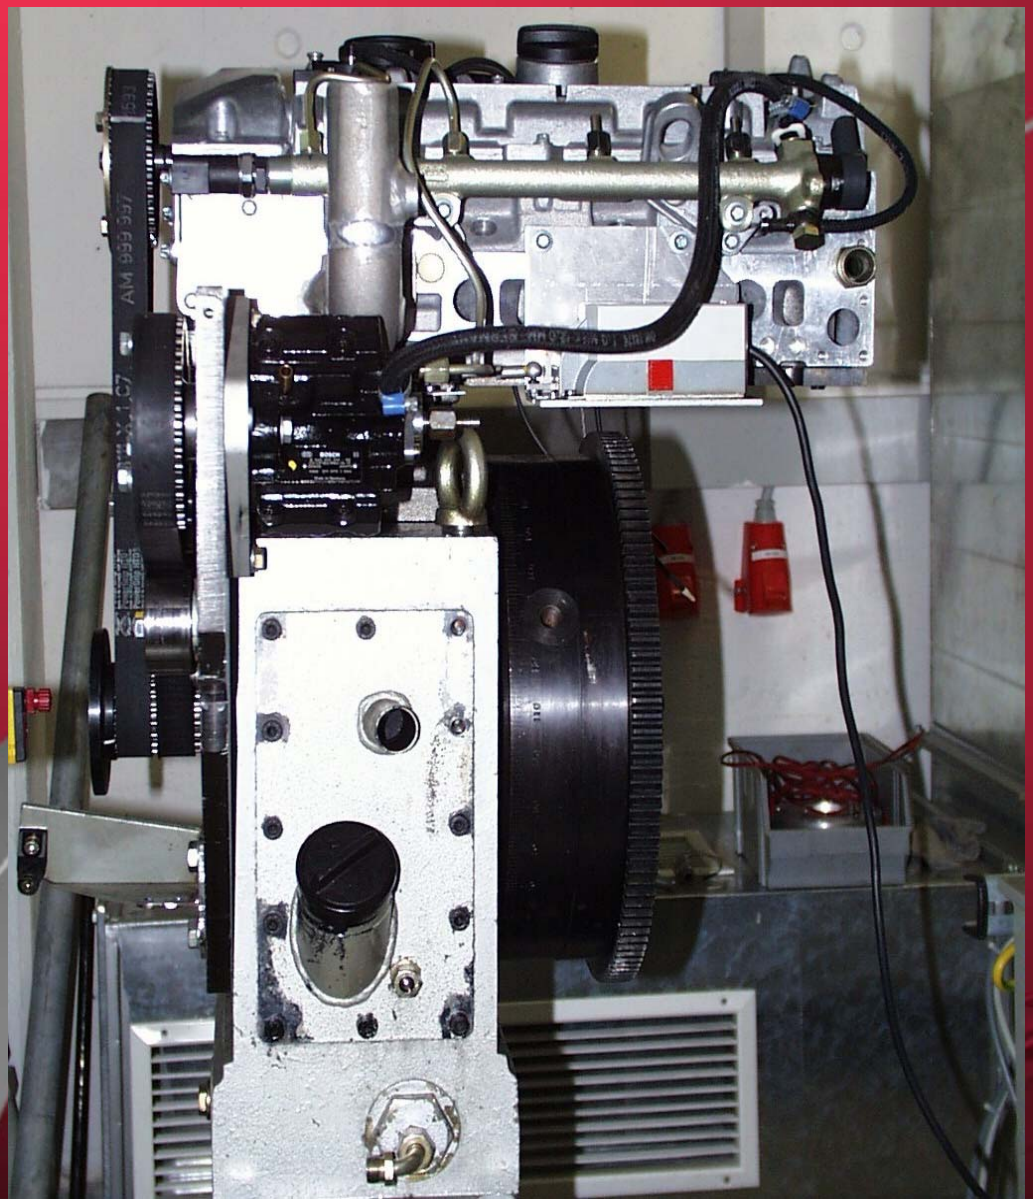

FKFS

THE OHIO STATE UNIVERSITY

Multi-cylinder engine tests

- Implementation on a multi-cylinder, direct-injection engine in engine test cell.
- Investigation of steady state engine characteristics with mixed mode HCCI.
  - Torque production, emissions, fuel consumption

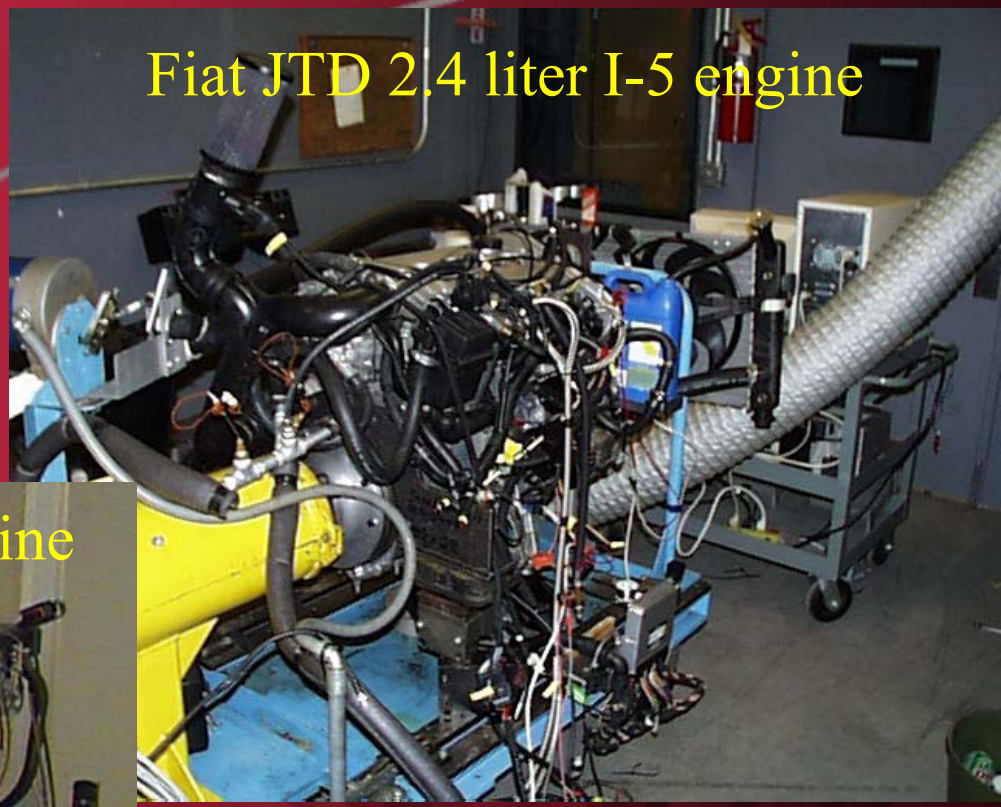

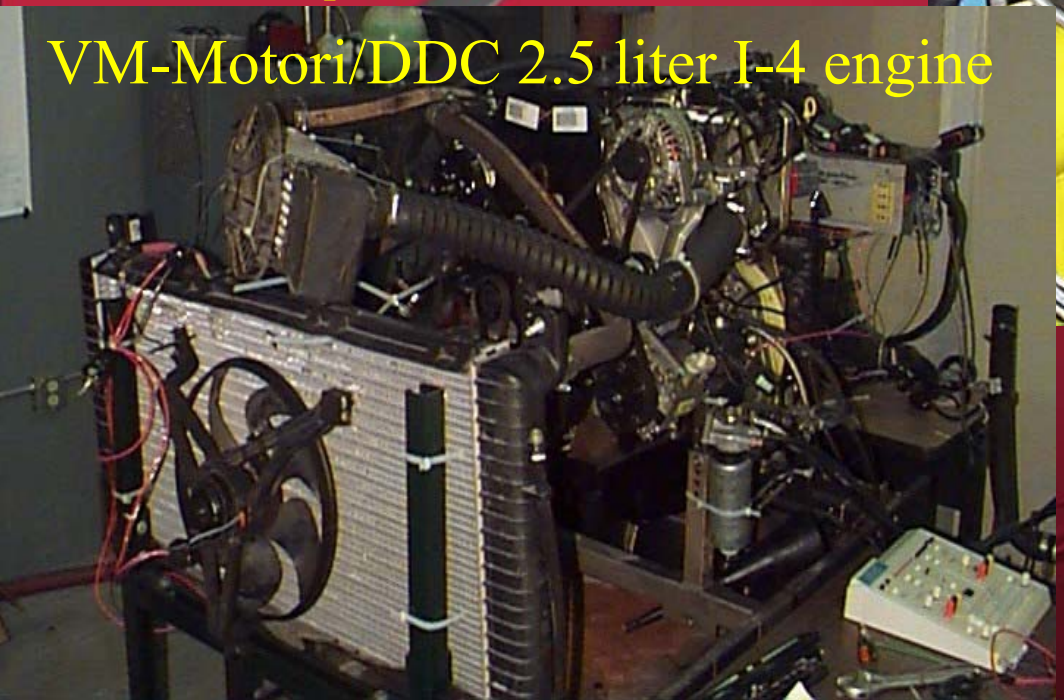

THE OHIO STATE UNIVERSITY

Vehicle tests
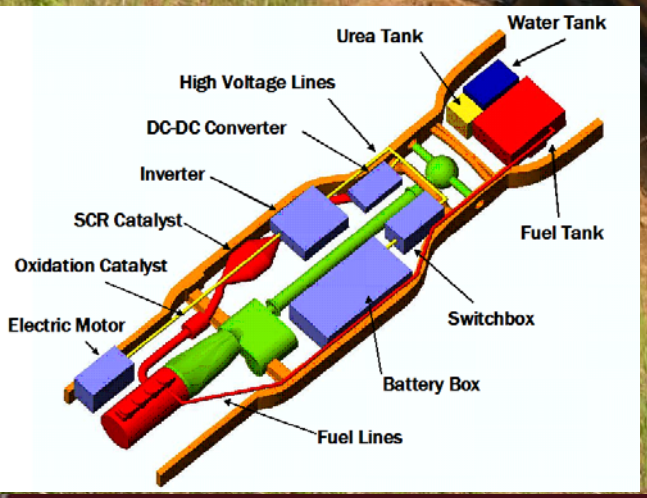
FutureTruck 2004, Ford Motor Co.
Michigan Proving Ground, Romeo, MI