Biodiesel Research Update

Bob McCormick
National Renewable Energy Laboratory
Golden, Colorado

Presented at US DOE 10th Annual Diesel Engine Emissions Reduction Conference
Coronado, California
August 30, 2004

Acknowledgement

U.S. Department of Energy
Energy Efficiency and Renewable Energy
Bringing you a prosperous future where energy is clean, abundant, reliable, and affordable

Office of FreedomCAR and Vehicle Technologies
Fuels Technology Subprogram

U.S. Biodiesel Feedstock Supply Analysis

- 1.7 billion annual gallon existing resource
- Additional 3.5 billion annual gallons by 2015
- Perhaps 10 billion annual gallons by 2030
- Technical barriers:
  - Glycerin
  - Cloud point for animal fat-based fuels
  - Plant breeding and production methods for new crops
- US on-road market: ~40 billion annual gallons

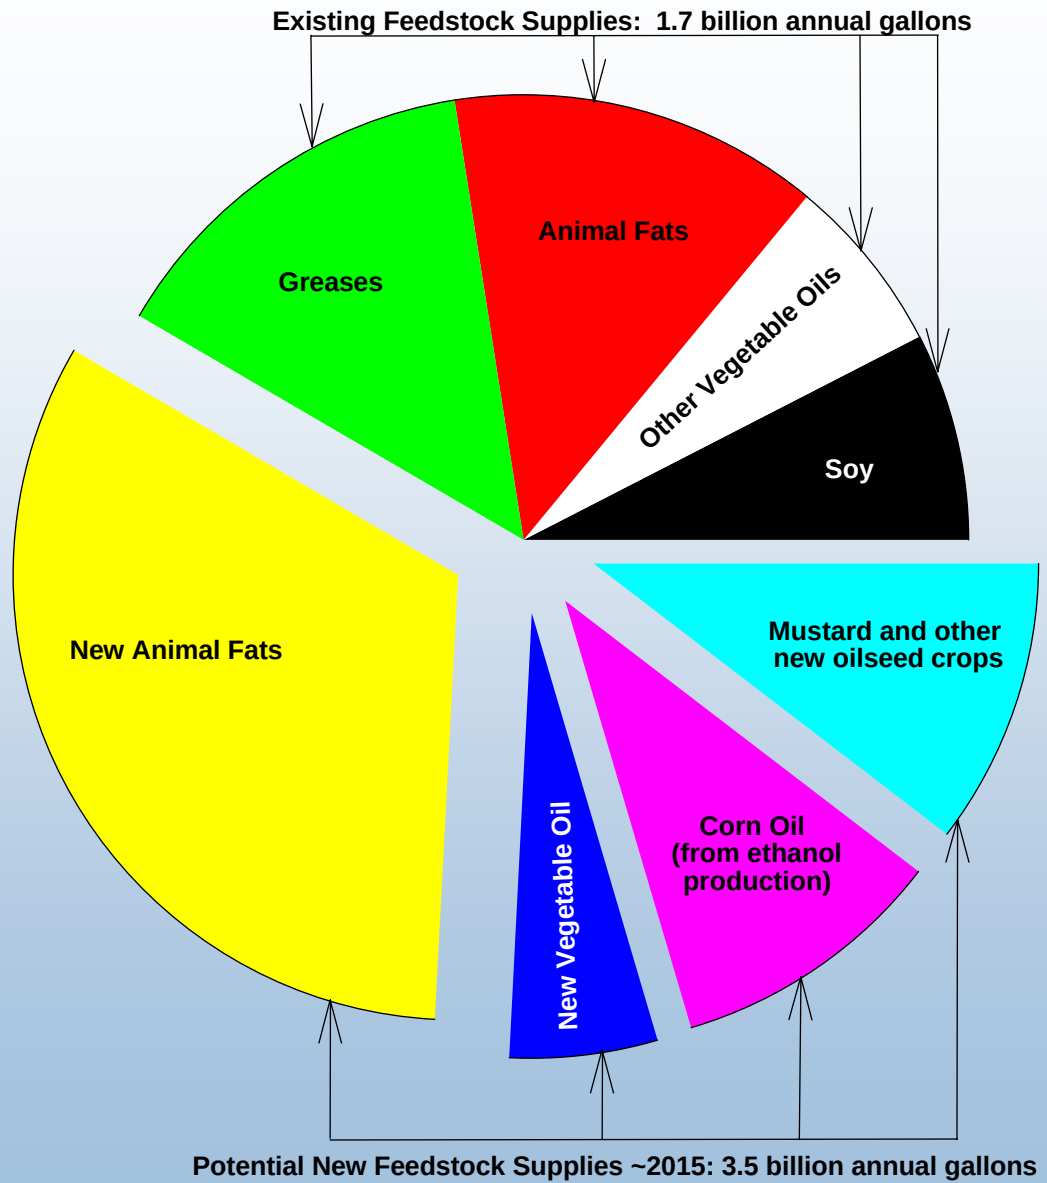

Feedstock analysis from NREL/TP-510-34796, June 2004

Energy Security and Global Warming Benefits

$$\text{Fossil Energy Ratio (FER)} = \frac{\text{Energy Delivered to Customer}}{\text{Fossil Energy Used}}$$

For soybean-based biodiesel = 3.2 (urban bus assessment)

Fossil energy used in production is similar to petroleum, small fraction of fuel energy-truly renewable

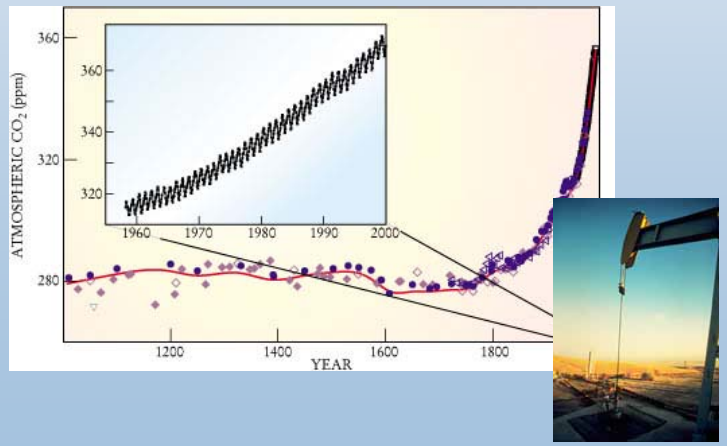

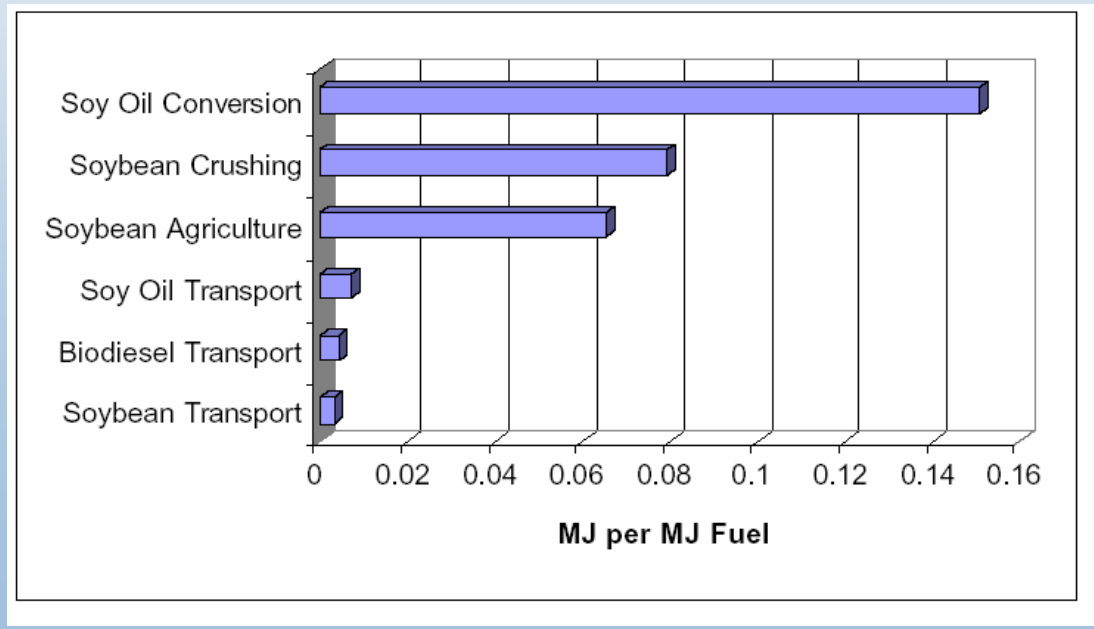

Analysis from NREL/TP-580-24772, May 1998

Biodiesel Quality Specification

- ASTM D6751 specifies the quality of biodiesel to be used for blending in the US
  - Two grades, S500 and S15
  - Notably does not include oxidation stability
  - Currently no standards for biodiesel blends

Property	Test Method[B]	Grade S15 Limits	Grade S500 Limits	Units
Flash point (closed cup)	D 93	130.0 min	130.0 min	°C
Water and sediment	D 2709	0.050 max	0.050 max	% volume
Kinematic viscosity, 40°C	D 445	1.9-6.0[C]	1.9–6.0[C]	mm^2/s
Sulfated ash	D 874	0.020 max	0.020 max	% mass
Sulfur[D]	D 5453	0.0015 max (15)	0.05 max (500)	% mass (ppm)
Copper strip corrosion	D 130	No. 3 max	No. 3 max	
Cetane number	D 613	47 min	47 min	
Cloud point	D 2500	Report[E]	Report[E]	°C
Carbon residue[F]	D 4530	0.050 max	0.050 max	% mass
Acid number	D 664	0.80 max	0.80 max	mg KOH/g
Free glycerin	D 6584	0.020	0.020	% mass
Total glycerin	D 6584	0.240	0.240	% mass
Phosphorus content	D 4951	0.001 max	0.001 max	% mass
Distillation temperature, Atmospheric equivalent temperature, 90 % recovered	D 1160	360 max	360 max	°C

Biodiesel Quality Survey

- Samples obtained nationwide from biodiesel blenders (27 samples)
- Tested using methods in D6751 as well as stability tests
- *85% of samples tested met the ASTM D6751 specification*
- Four samples failed because they exceeded limits on:
  - phosphorus
  - total glycerin
  - acid number
  - acid number and total glycerin
- Blenders/distributors depend completely on producers to insure quality
  - Only “visual” quality checks were made, no sample testing

B100 Sampling Locations

-green flags

Biodiesel Quality Survey: Sulfur

- Distributors have generally not yet begun to distinguish between S15 and S500 grades
- All but two samples met S15
- One sample exhibited 83 ppm Sulfur *and* 3x the allowable Phosphorus
  - Speculate lube oil contamination?

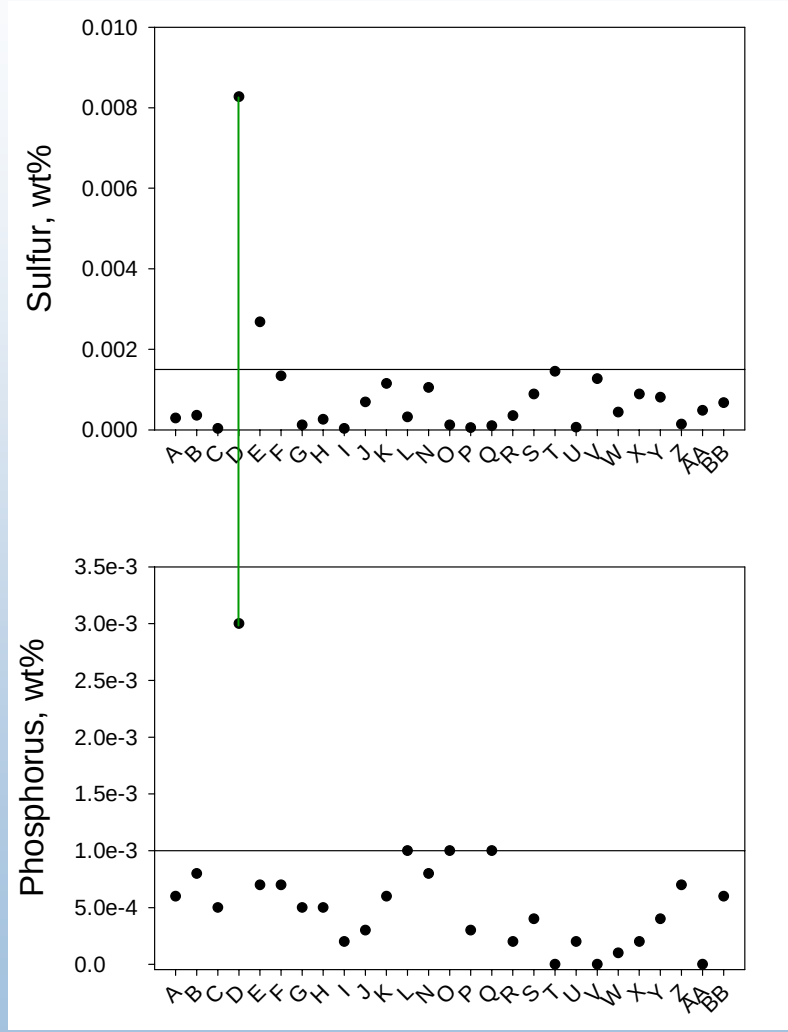

Oxidation Stability – Rancimat (EN14112)

- Air bubbled through sample at 110°C.
- Measures formation of volatile acids-not directly related to fuel performance
- EN14214 requires min. 6 hr induction time
- Only one US sample would meet this requirement - 6 hr induction time may not be appropriate for US biodiesel
- Antioxidants can increase induction time

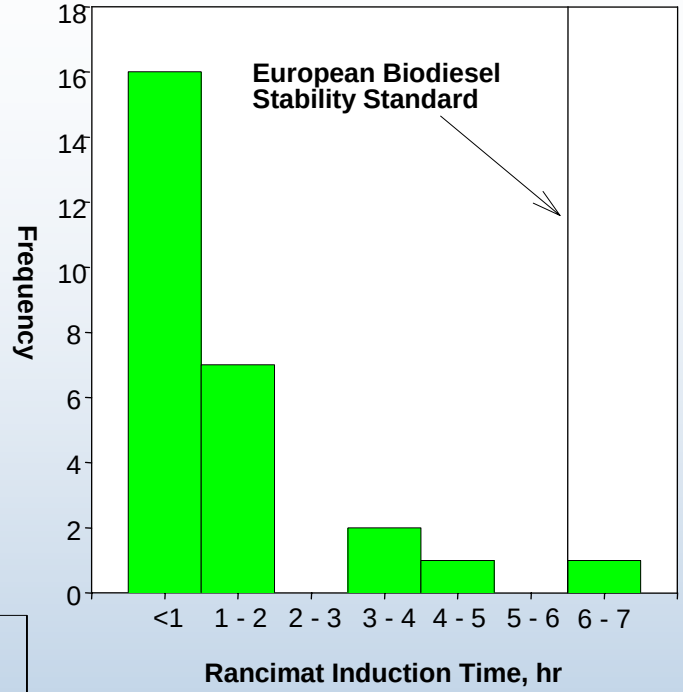

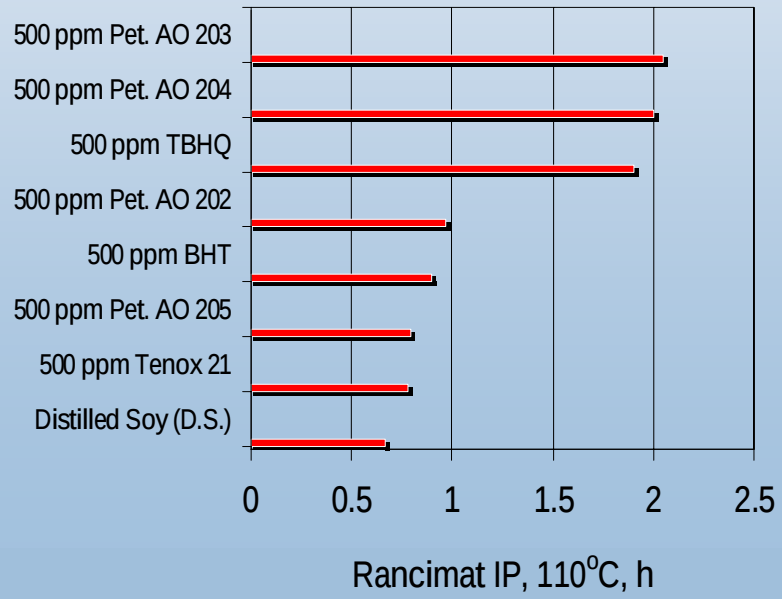

Oxidation Stability – D2274

- Exposure to oxygen at 95°C for 16 hours
- Filtration and weighing of deposits – directly related to fuel performance
- Limits for this test have not been determined for biodiesel
- Antioxidants are effective for reducing deposits

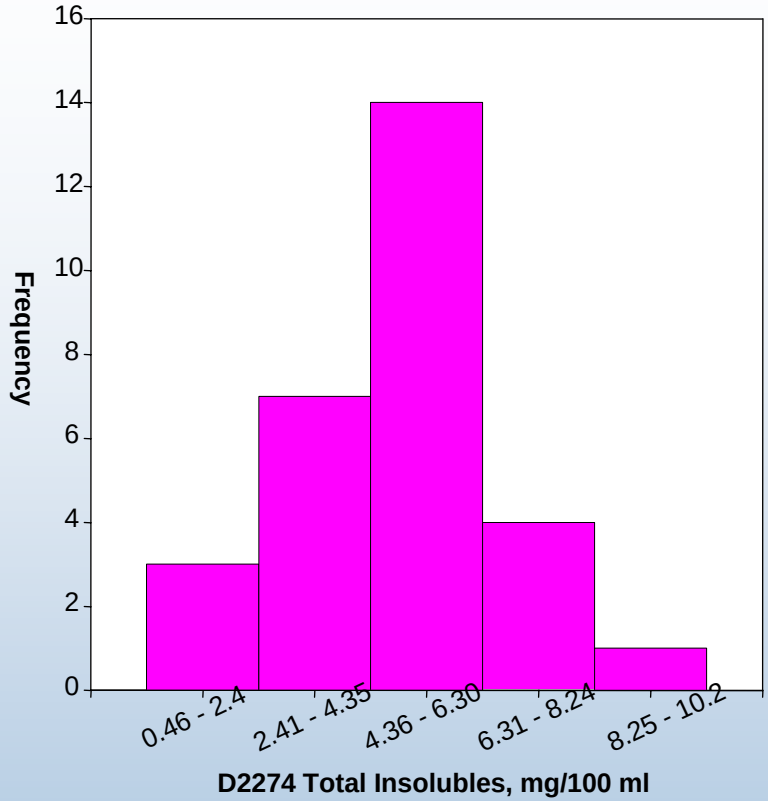

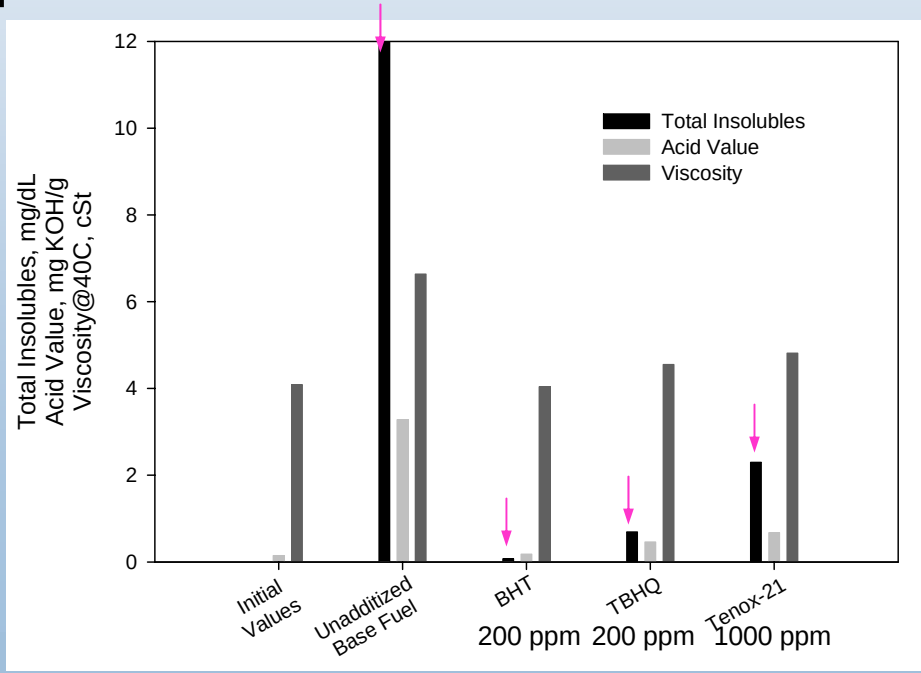

Considerable work remains to determine an appropriate test and limit for biodiesel oxidation stability

Emissions in Older Engines

EPA analysis:

- data from many studies
- engine models through 1997

- NOx 2% increase B20, 10% for B100
- PM 10% decrease for B20, 50% for B100

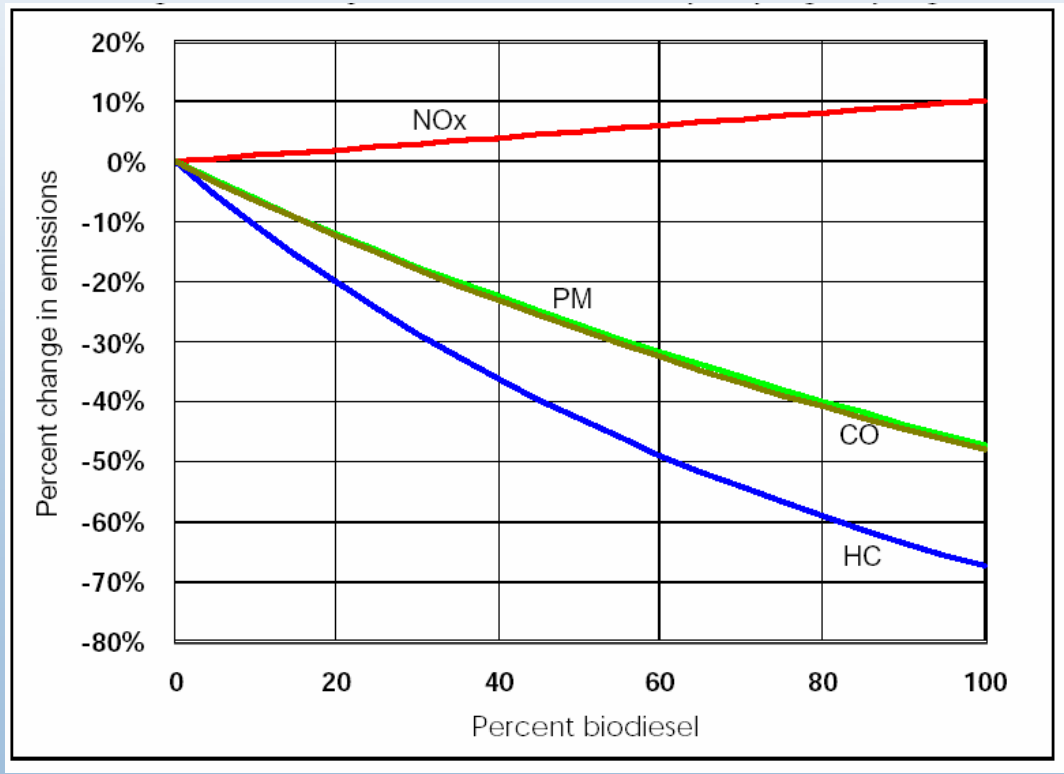

EPA420-P-02-001, October 2002

Newer Engines: 2004 Cummins ISB – B100

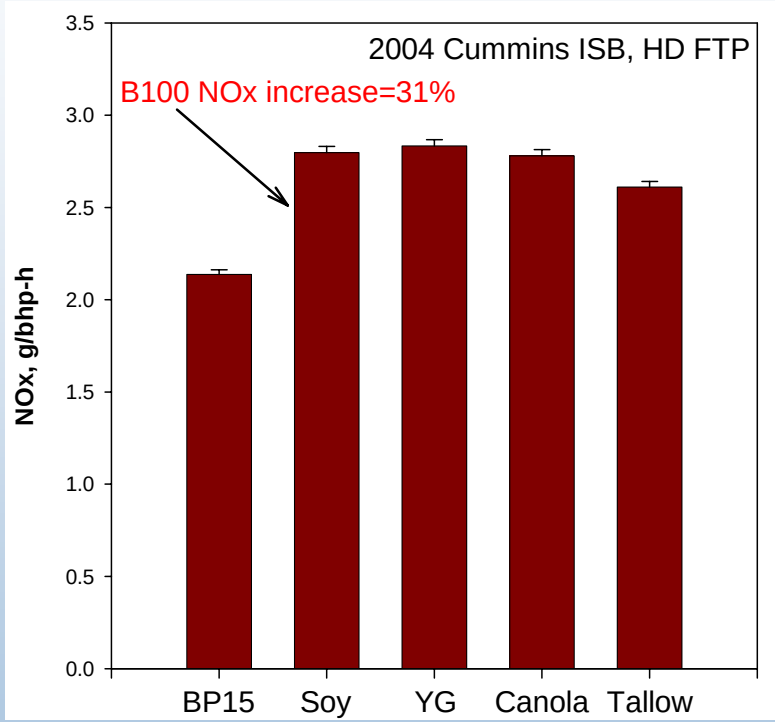

- HD FTP compared to ULSD
- Larger NOx increase than older engines
  - 31% vs 10%
- More saturated fuel (tallow) has somewhat lower NOx
- Large PM reduction than older engines
  - 75% versus 50%
- EGR valve opens less on B100 compared to ULSD

New Engines: Single Cylinder Caterpillar Engine – B20

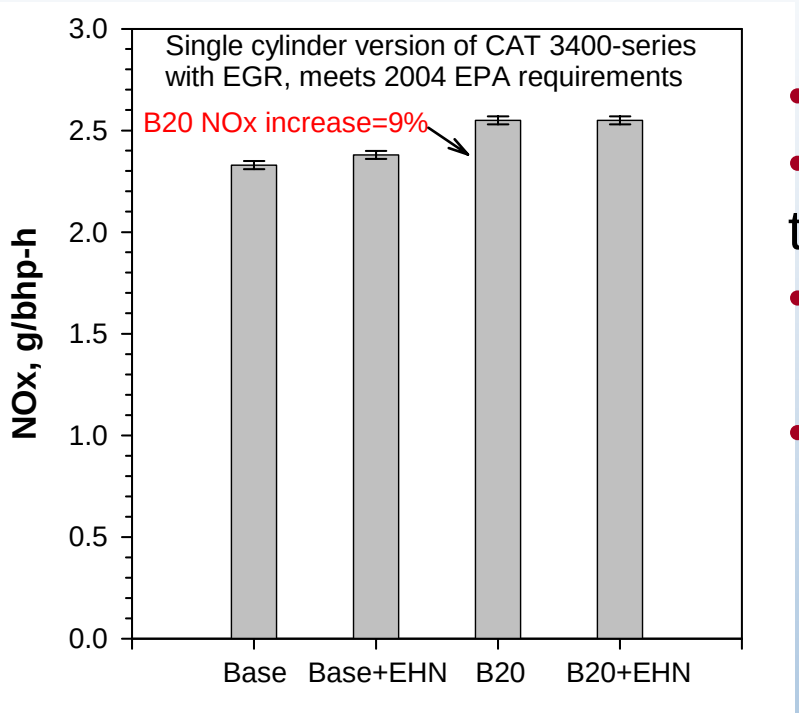

- 8-Mode SS compared to oil sands No. 2
- Single cylinder engine modified with EGR to meet 2004 standard.
- NOx increase larger than for older engines
  - 9% vs 2%
- PM reduction larger than for older engines
  - 25% vs 10%

New Engines: 2004 DDC Series 60 – B20

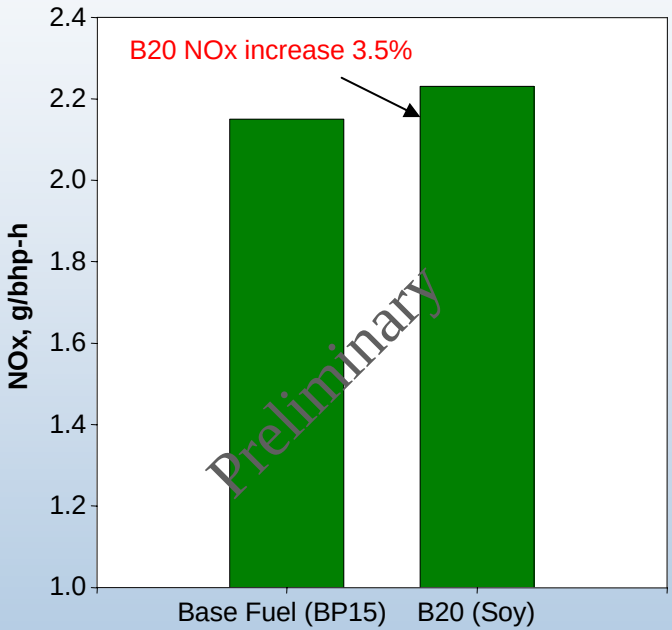

- HD FTP compared to ULSD
- Similar NOx increase as older engines
  - 3.5% vs 2%
- Larger PM reduction than older engines
  - 28% versus 10%

Why Does Biodiesel Increase NO_x?

- Biodiesel exhibits higher bulk modulus of compressibility than petro-diesel
- van Gerpen proposed that this causes advance in injection timing, increasing NO_x (*J. Am. Oil Chemists Society, 2000. 77(3):285*).
- More recently, Boehman has shown this experimentally, and that the start of combustion is also advanced by up to 4 CA degrees *(SAE 2003-01-1039).*

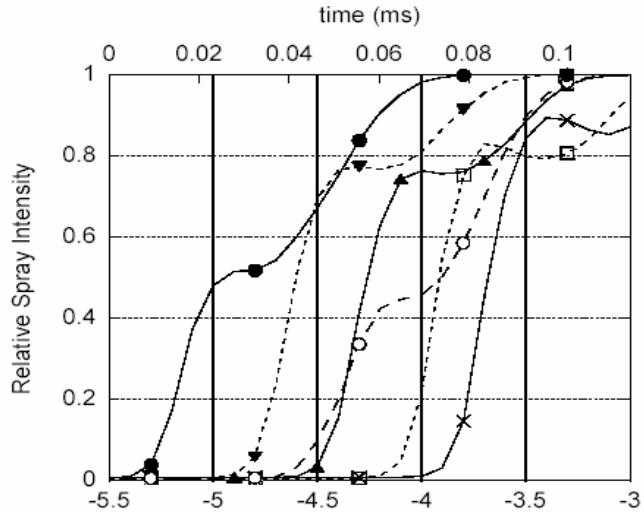

Start of injection timing by laser attenuation, 25% load. (X) Baseline, (□) B20, (▲) B40, (▼) B60, (○) B80, and (●) B100

Biodiesel NO_x may increase because of advanced injection timing and start of combustion

Biodiesel PM Reduction Mechanism Revealed

Research at Sandia National Laboratories/California (Chuck Mueller)

- Approach: Use optical-engine experiments to enhance fundamental understanding of biodiesel combustion and emissions formation
  - Complemented by kinetic modeling and carbon-14 isotopic labeling collaborations with Lawrence Livermore National Lab
- Recent result: ***Direct formation of CO_2 from ester causes two O-atoms to be used to remove one C-atom***
  - Ideally, each O-atom in fuel removes one C-atom from soot-formation pathways (i.e., one O-atom is wasted)
  - Ester structure found in biodiesel is less effective than ether at suppressing soot emissions
  - SAE Papers: 2003-01-1791, 2004-01-1849



- Current focus: Determine reason(s) for elevated NO_x emissions with biodiesel fueling
  - Collaboration with Prof. Ed Cheng of San Francisco State Univ.

Potential for Biodiesel in LTC Explored

Research at Oak Ridge National Laboratory (Wagner et al.)

- Biodiesel (B100) did not show a transition into high-efficiency clean combustion.
- Somewhat surprising, expected O_2 content to help.
- All three petroleum-based fuels (CERT, CARB, ECD1) behaved very similarly.
- B100 data was very erratic.
- ORNL hopes to repeat some experiments this FY to confirm earlier results.

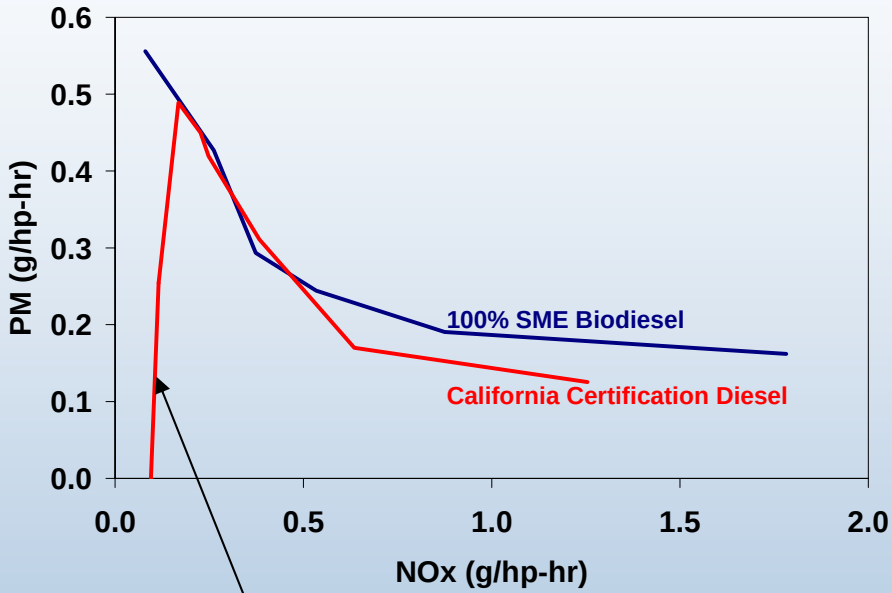

Transition to Low-NO_x, Low-PM Combustion
Caused by increasing EGR to 55%, changing fuel injection

Mercedes 1.7-L engine
1500 rpm/25.9 ft-lb

Closing Remarks

- Survey results indicate that 85% of US biodiesel meets the ASTM quality standard
- Oxidation stability issues still being studied
  - Best test method not yet defined
  - Antioxidants appear to be effective
- Modern (2004) engines show NO_x increase and PM reduction
  - Magnitude may be larger than in older engines
  - Cause of NO_x increase and solutions to this problem are still under investigation